


# Disk-Size SBCs

Intel® 2nd Generation Core™ i7/i5/i3-Based

Intel® 2nd Generation Core™ i7/ i5 / i3/ Celeron® 3.5-inch Disk Size SBC w/ Intel® QM67 Chipset



## IB905

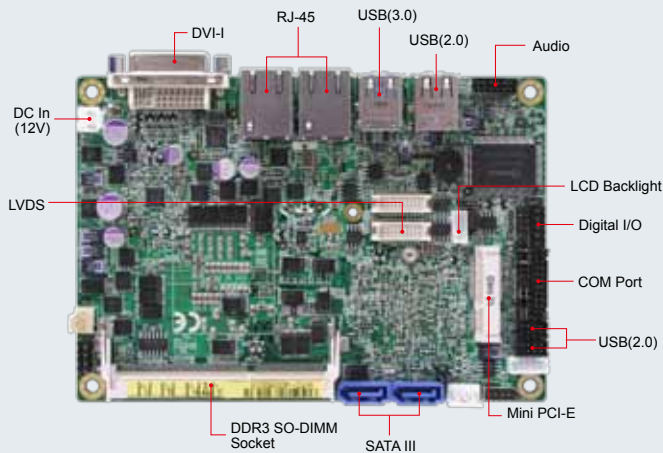

### Features

- Supports 2nd Generation Intel® Core™ i7/i5/i3/ Celeron® QC/DC Processors, up to 2.6GHz
- 1x DDR3 SO-DIMM , Max. 4GB
- Supports DVI-I and LVDS( 24-bit dual channel)
- Dual Gigabit LAN
- Watchdog timer
- 6x USB 2.0 , 2 x USB 3.0 , 2 x COM, 2x SATA III

### System

CPU	rPGA988B for Intel® 2nd Generation Core™ i7 / i5 / i3 / /Celeron® QC/ DC processors, up to 2.6GHz
System Memory	1x DDR3 SO-DIMM, Max. 4GB (Non-ECC)
System Chipset	Intel® QM67 PCH
BIOS	AMI BIOS
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slots	1x Mini PCI-E [Half-sized]

### Graphics

VGA Controller	Intel® Core™ i7/i5/i3/Celeron® processor integrated Gfx Gen 5.75
VGA Memory	Max. shared memory – 1024MB
Display Interface	Support VGA , DVI and 24-bit dual channel LVDS

### Ethernet

Controller	Intel® 82579V Gigabit LAN PHY Intel® 82583V PCI-E Gigabit LAN
Connector	2x RJ-45 on board

### Multi I/O

Chipset	Fintek F81865-I 1x RS232, 1x RS-232/422/485, 2x SATA III
USB	2 ports onboard (USB 3.0) 2 ports onboard , 4 ports via pin-header (USB 2.0)
Audio	Intel® QM67 built-in HD audio controller w/ Realtek ALC662 Codec for 5.1 CH
Others	Digital I/O, +12V DC In, 1x smart battery

### Mechanical and Environmental

Dimensions	102mm x 147mm (4" x 5.8")
Max. Power Requirement	Intel® 2nd generation Core™ i7-2710QE 2.1GHz w/ 2GB DDR3-1333 +12V : 3.63A
Operating Temperature	0°C~60°C (32 F~140 F)
Storage Temperature	-20 C~80 C (-40 F~167 F)
Relative Humidity	10%~90% (non-condensing)

### Ordering Information

IB905F	rPGA988B for Intel® 2nd Generation Core™ i7/i5/i3 & Celeron® 3.5" SBC w/ DVI-I(CRT+DVI)+24-bit LVDS & Dual GbE LAN
IB63	Cable kit for IB905F, w/ SATA + Power cable, COM, USB, Audio, Power cable
HSIB905-PGA	Heatsink for IB905



Remarks:

\* Specifications are subject to change without prior notice.