

# User's Manual

A high-performance, fanless industrial PC with a large aluminum heat sink and various ports including Ethernet, USB, DP, and SATA.

## **Copyright**

© 2024 IBASE Technology, Inc. All rights reserved.

No part of this publication may be reproduced, copied, stored in a retrieval system, translated into any language or transmitted in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written consent of IBASE Technology, Inc. (hereinafter referred to as “IBASE”).

## **Disclaimer**

IBASE reserves the right to make changes and improvements to the products described in this document without prior notice. Every effort has been made to ensure the information in the document is correct; however, IBASE does not guarantee this document is error-free.

IBASE assumes no liability for incidental or consequential damages arising from misapplication or inability to use the product or the information contained herein, nor for any infringements of rights of third parties, which may result from its use.

## **Trademarks**

All the trademarks, registrations and brands mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

# Compliance

## CE

This product has passed CE tests for environmental specifications and limits. This product is in accordance with the directives of the European Union (EU). If users modify and/or install other devices in this equipment, the CE conformity declaration may no longer apply.

## FCC

AMS320 has been tested and found to comply with the limits for a Class B device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with manufacturer's instructions, may cause harmful interference to radio communications.

## WEEE



This product must not be disposed of as normal household waste, in accordance with the EU directive of for waste electrical and electronic equipment (WEEE - 2012/19/EU). Instead, it should be disposed of by returning it to a municipal recycling collection point. Check local regulations for disposal of electronic products.

## Green IBASE



This product is compliant with the current RoHS 2 restrictions and prohibits use of the following substances in concentrations exceeding 0.1% by weight (1000 ppm) except for cadmium, limited to 0.01% by weight (100 ppm).

- Hexavalent chromium: 1,000 ppm
- Poly-brominated biphenyls (PBBs): 1,000 ppm
- Poly-brominated diphenyl ethers (PBDEs): 1,000 ppm
- Cadmium: 100 ppm
- Mercury: 1,000 ppm
- Lead: 1,000 ppm
- Bis(2-ethylhexyl) phthalate (DEHP): 1,000 ppm
- Butyl benzyl phthalate (BBP): 1,000 ppm
- Dibutyl phthalate (DBP): 1,000 ppm
- Diisobutyl phthalate (DIBP): 1,000 ppm

# Important Safety Information

Carefully read the precautions before using the device.

## Environmental conditions:

- Lay the device horizontally on a stable and solid surface.
- Make sure you leave plenty of space around the device for ventilation.
- Use this product in environments with ambient temperatures -10°C ~ 50°C.
- Do not leave this device in an environment where the storage temperature may go below -20°C or above 80°C.

## Care for your IBASE products:

- Before cleaning the device, turn it off and unplug all cables such as power in case a small amount of electrical current may still flow.
- Use neutral cleaning agents or diluted alcohol to clean the device chassis with a cloth. Then wipe the chassis with a dry cloth.
- Vacuum the dust with a computer vacuum cleaner to prevent the air vent or slots from being clogged.



## WARNING

## Attention during use:

- Do not use this product near water.
- Do not spill water or any other liquids on your device.
- Do not place heavy objects on the top of the device.
- Operate this device from the type of power indicated on the marking label. If you are not sure of the type of power available, consult your distributor or local power company.
- Ensure that you apply correctly the power supply voltage.
- Do not walk on the power cord or allow anything to rest on it.
- If you use an extension cord, make sure that the total ampere rating of the product plugged into the extension cord does not exceed its limits.

## Avoid Disassembly

It is advised to disassemble, repair or make any modification to the device. Disassembly, modification, or any attempt at repair could generate hazards and cause damage to the device, even bodily injury or property damage, and will void any warranty.



## CAUTION

Danger of explosion if internal lithium-ion battery is replaced by an incorrect type. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.

## Warranty Policy

- **Industrial standard products:**

24-month (2-year) warranty from the date of shipment. If the date of shipment cannot be ascertained, the product serial numbers can be used to determine the approximate shipping date.

- **3<sup>rd</sup>-party parts:**

12-month (1-year) warranty from delivery for the 3<sup>rd</sup>-party parts that are not manufactured by IBASE, such as CPU, memory, storage device, power adapter, panel and touchscreen.

\* PRODUCTS, HOWEVER, THAT FAIL DUE TO MISUSE, ACCIDENT, IMPROPER INSTALLATION OR UNAUTHORIZED REPAIR SHALL BE TREATED AS OUT OF WARRANTY AND CUSTOMERS SHALL BE BILLED FOR REPAIR AND SHIPPING CHARGES.

## Technical Support & Services

1. Visit IBT website at [www.ibt.ca](http://www.ibt.ca) to find the latest information about the product, or your local dealer.
2. If you encounter any technical problems and require assistance from your distributor or sales representative, please prepare and send the following information:
  - Product model name
  - Product serial number
  - Detailed description of the problem
  - The error messages in text or in screenshots if there is any
  - The arrangement of the peripherals
  - Software in use (such as OS and application software, including the version numbers)

and send this to [support@ibt.ca](mailto:support@ibt.ca) with your question

# Table of Contents

---

|                  |                                                        |           |
|------------------|--------------------------------------------------------|-----------|
| <b>Chapter 1</b> | <b>General Information .....</b>                       | <b>1</b>  |
| 1.1              | Introduction .....                                     | 2         |
| 1.2              | Features.....                                          | 2         |
| 1.3              | Packing List .....                                     | 3         |
| 1.4              | Optional Accessories .....                             | 3         |
| 1.5              | Specifications.....                                    | 4         |
| 1.6              | Product View – AMS320 .....                            | 6         |
| 1.7              | Dimensions – AMS320.....                               | 8         |
| <b>Chapter 2</b> | <b>Hardware Configuration .....</b>                    | <b>10</b> |
| 2.1              | Hardware Installations.....                            | 11        |
| 2.1.1            | Memory Installation / Replacement.....                 | 11        |
| 2.1.2            | M.2 Installation / Replacement.....                    | 12        |
| 2.1.3            | SSD Installation .....                                 | 13        |
| 2.1.4            | WiFi / 4G / 5G Antenna Installation.....               | 14        |
| 2.1.5            | Mounting Installation.....                             | 15        |
| 2.2              | Jumper Setting.....                                    | 16        |
| 2.3              | Jumper & Connector Locations on Motherboard .....      | 17        |
| 2.4              | Jumpers Quick Reference.....                           | 18        |
| 2.4.1            | Clear RTC (JP1) .....                                  | 18        |
| 2.4.2            | Clear ME (JP2) .....                                   | 19        |
| 2.4.3            | M.2 B-Key Support Type (JP4) .....                     | 20        |
| 2.4.4            | AT/ATX Mode Setting (JP5).....                         | 21        |
| 2.5              | Connectors Quick Reference .....                       | 22        |
| 2.5.1            | LED1: 4x LED Indicators .....                          | 23        |
| 2.5.2            | CN2: Line Out Jack .....                               | 23        |
| 2.5.3            | CN3: COM1 / COM2 Ports.....                            | 23        |
| 2.5.4            | CN4: USB 2.0 Ports.....                                | 23        |
| 2.5.5            | CN5, CN7: DisplayPort Ports.....                       | 23        |
| 2.5.6            | CN6, CN8: USB 3.1 Ports.....                           | 23        |
| 2.5.7            | CN9, CN10, CN11: I226V GbE Ports.....                  | 23        |
| 2.5.8            | CN12 : Terminal Block Connector for Remote Access..... | 23        |
| 2.5.9            | J14: DC_IN Connector (2-pin terminal block).....       | 23        |
| 2.5.10           | J1: RTC Battery Connector.....                         | 24        |
| 2.5.11           | J2: SATA Power Connector .....                         | 24        |
| 2.5.12           | J3, J4: SO-DIMM Sockets .....                          | 24        |
| 2.5.13           | J5: SPI Debug Header .....                             | 25        |

|                                                |                                                    |           |
|------------------------------------------------|----------------------------------------------------|-----------|
| 2.5.14                                         | J6: SIM Card Slot for 4G/5G .....                  | 25        |
| 2.5.15                                         | J7: M.2 E-Key Socket .....                         | 25        |
| 2.5.16                                         | J9: M.2 B-Key Socket .....                         | 26        |
| 2.5.17                                         | J10: ESPI Debug Header .....                       | 26        |
| 2.5.18                                         | J11: Reset Header.....                             | 26        |
| 2.5.19                                         | J12: Digital IO Connector.....                     | 27        |
| 2.5.20                                         | J13 : AT On/Off Switch .....                       | 27        |
| <b>Chapter 3     Driver Installation .....</b> |                                                    | <b>28</b> |
| 3.1                                            | Introduction .....                                 | 29        |
| 3.2                                            | Intel® Chipset Software Installation Utility.....  | 29        |
| 3.3                                            | Graphics Driver Installation .....                 | 31        |
| 3.4                                            | HD Audio Driver Installation .....                 | 32        |
| 3.5                                            | LAN Driver Installation .....                      | 33        |
| 3.6                                            | Intel® Management Engine Driver Installation ..... | 34        |
| 3.7                                            | Intel® Thunderbolt Drivers Installation .....      | 35        |
| <b>Chapter 4     BIOS Setup .....</b>          |                                                    | <b>36</b> |
| 4.1                                            | Introduction .....                                 | 37        |
| 4.2                                            | BIOS Setup.....                                    | 37        |
| 4.3                                            | Main Settings .....                                | 38        |
| 4.4                                            | Advanced Settings .....                            | 39        |
| 4.5                                            | Chipset Settings.....                              | 48        |
| 4.6                                            | Security Settings .....                            | 50        |
| 4.7                                            | Boot Settings.....                                 | 51        |
| 4.8                                            | Save & Exit Settings.....                          | 52        |
| <b>Appendix .....</b>                          |                                                    | <b>53</b> |
| A.                                             | I/O Port Address Map.....                          | 54        |
| B.                                             | Interrupt Request Lines (IRQ) .....                | 56        |
| C.                                             | Watchdog Timer Configuration.....                  | 57        |

**This page is intentionally left blank.**

# Chapter 1

## General Information

The information provided in this chapter includes:

- Features
- Packing List
- Optional Accessories
- Specifications
- Product View
- Dimensions

## 1.1 Introduction

Designed for machine automation, industrial applications, and harsh environments, the fanless AMS320 embedded computer delivers high performance with low power consumption and operates within a temperature range from -10°C to 60°C with airflow. Engineered with a passive finned heat sink for efficient heat transfer, the AMS320 incorporates the MBE320 motherboard, powered by 11th Gen Intel® Core™ i7/i5/i3 processors. It supports dual DDR4 SO-DIMM up to 64GB and features front removable drive bays for easy HDD/SSD replacement. The system includes six antenna ports and ensures robust connectivity through M.2 2230 E-Key and 3052 B-Key slots, supporting WLAN, 4G, and 5G modules.



AMS320

## 1.2 Features

- Compact fanless system with for IBASE MBE320 board
- 11th Gen Intel® Core™ i7/i5/i3 Processors
- Front removable drive bay for HDD/SSD
- Over/Under/Reverse voltage protection
- Supports DIN-rail mount & wall mount
- SoftWare TPM 2.0

### 1.3 Packing List

Your product package should include the items listed below. If any of the items below is missing, contact the distributor or the dealer from whom you purchased the product.

#### AMS320

- AMS320 x 1
- Terminal Block for DC-In Power Adapter (3-pin) x 1
- Terminal Block for Remote Power Button (2-pin) x 1
- Wall Mount Kit x 1
- Round Head Screw (for Wall Mount Kit) x 4



### 1.4 Optional Accessories

- WiFi / Bluetooth antenna kit
- LTE / 5G antenna kit
- GPS antenna kit
- 24V/180W power adaptor

## 1.5 Specifications


| Models                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AMS320-i7M</b><br>Fanless System with MBE320-i7 and Intel® Core™ i7 1185G7E Processor |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>AMS320-i5M</b><br>Fanless System with MBE320-i5 and Intel® Core™ i5 1145G7E Processor |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>AMS320-i3M</b><br>Fanless System with MBE320-i3, w/ Intel® Core™ i3 1115G4E Processor |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| System                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Motherboard</b>                                                                       | MBE320                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Operating System</b>                                                                  | <ul style="list-style-type: none"><li>• Windows10 (64-bit)</li><li>• Linux Ubuntu</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>CPU</b>                                                                               | 11th Gen Intel® Core™ i7/i5/i3 Mobile Processors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>CPU Speed</b>                                                                         | Up to 4.4GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Memory</b>                                                                            | 2x DDR4 SO-DIMM, Max. 64GB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Rear Panel External I/O</b>                                                           | <ul style="list-style-type: none"><li>• 1x 2-pin DC-in terminal block for 24V (±10%)</li><li>• 1x 2-pin terminal block for remote power button</li><li>• 1x Power Button</li><li>• 3x RJ45 2.5G Ethernet port</li><li>• 2x DisplayPort connectors</li><li>• 3x USB 3.1 ports</li><li>• 3x USB 2.0 ports</li><li>• 1x RS232/422/485 port for COM#1</li><li>• 1x RS232 port for COM#2</li><li>• 1x Audio jack for Line-out</li><li>• 1x Red LED for HDD/SSD, 1x Green LED for Power, 1x Blue LED &amp; 1x White LED programmable</li></ul> |
| <b>Expansion Slots</b>                                                                   | 1x M.2 2230 E-Key (USB 2.0 & PCI-E)<br>1x M.2 3052 B-Key (USB 3.0 & PCI-E)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Storage</b>                                                                           | <ul style="list-style-type: none"><li>• 1x 2.5" HDD/SSD (external-accessible)</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Construction</b>                                                                      | Aluminum & steel Chassis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Color</b>                                                                             | Color Silver & Gray                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Mounting</b>                                                                          | <ul style="list-style-type: none"><li>• Desktop or wall mounting (wall mount kit included)</li><li>• Side mounting DIN-rail mounting (optional)</li></ul>                                                                                                                                                                                                                                                                                                                                                                                |

|                              |                                                                                                           |
|------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Dimensions</b>            | 275mm (W) x 140mm (D) x 70mm (H)<br>10.83" (W) x 5.51" (D) x 2.76" (H)                                    |
| <b>Weight</b>                | 2.75kg                                                                                                    |
| <b>Operating Temperature</b> | -10°C to 60°C (14°F~140°F) *with air flow<br>-10°C to 50°C (14°F to 122°F) without air flow               |
| <b>Storage Temperature</b>   | -20°C to 80°C (-4°F to 176°F)                                                                             |
| <b>Relative Humidity</b>     | 5~90% @ 45°C, (non-condensing)                                                                            |
| <b>Vibration</b>             | Non-Operating: 1.0 grms / 5~500Hz / random operation<br>Operating: 0.25 grms / 5~500Hz / random operation |
| <b>Shock</b>                 | Operating: 20 g / 11 ms<br>Non-operating: 40 g / 11 ms                                                    |
| <b>Certification</b>         | CE / LVD / FCC Class-B                                                                                    |

All specifications are subject to change without prior notice.

## 1.6 Product View – AMS320

### Front View

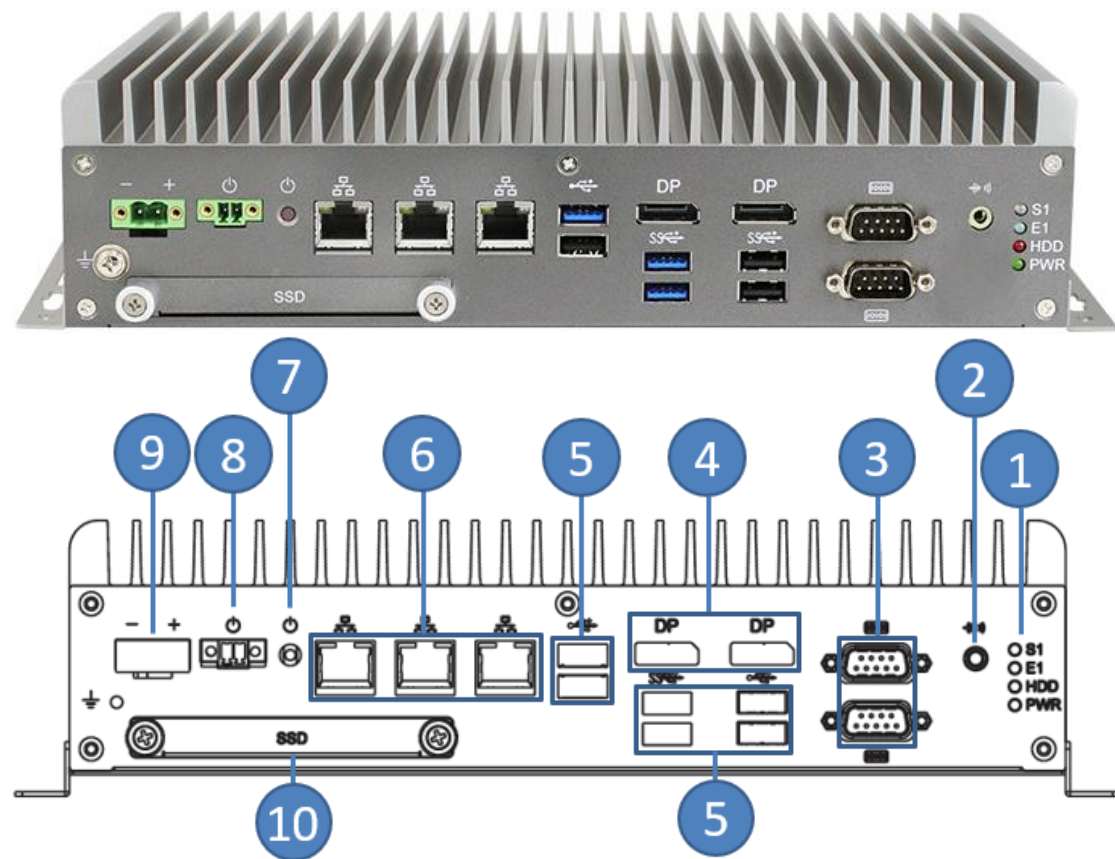

| No. | Name                                                                | No. | Name                                      |
|-----|---------------------------------------------------------------------|-----|-------------------------------------------|
| 1   | LED Indicator<br>(from top to bottom: S1*, E1*,<br>SSD, HDD, Power) | 6   | 3x 2.5GbE Ports                           |
| 2   | Audio Jack for Line-Out                                             | 7   | Power Button                              |
| 3   | 2x COM Ports                                                        | 8   | Terminal block for<br>remote power button |
| 4   | DP Ports                                                            | 9   | DC-in terminal block for<br>24V (±10%)    |
| 5   | 3x USB 3.1 & 3x USB 2.0                                             | 10  | SSD                                       |


\* The LED indicators S1 (for status) and E1 (for errors) are configurable by users.


## Rear View




## 1.7 Dimensions – AMS320

Unit: mm

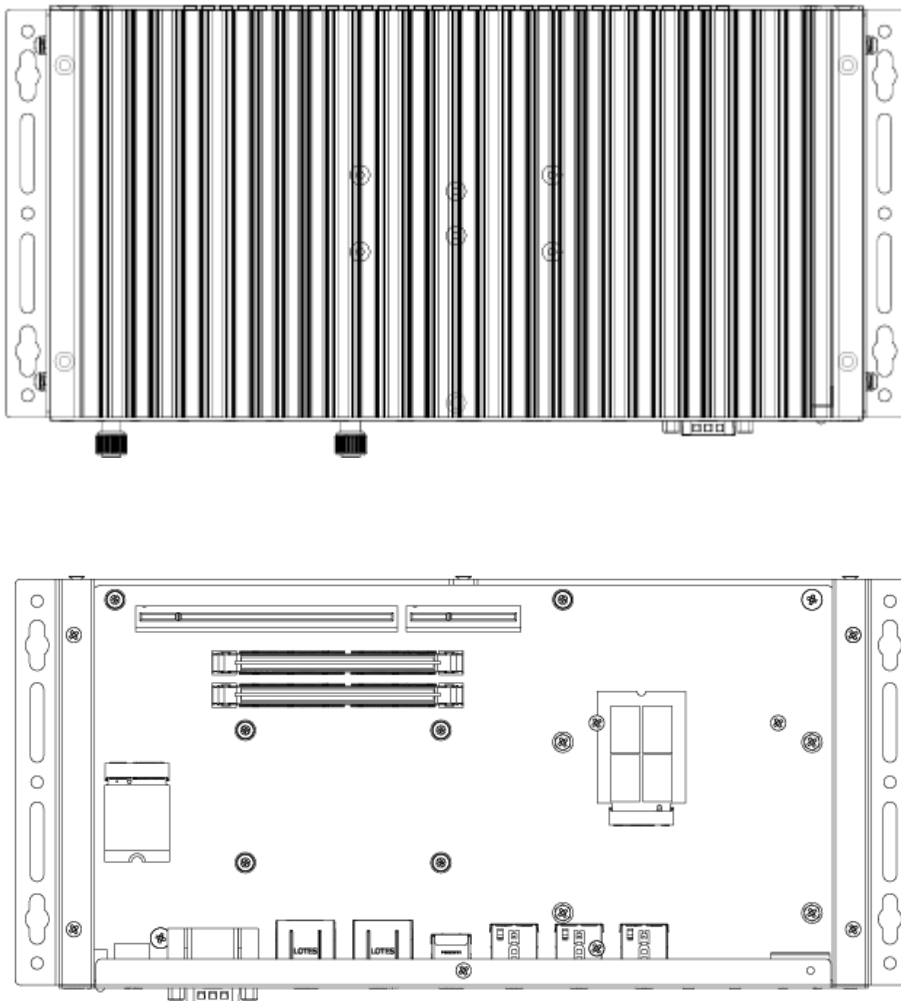

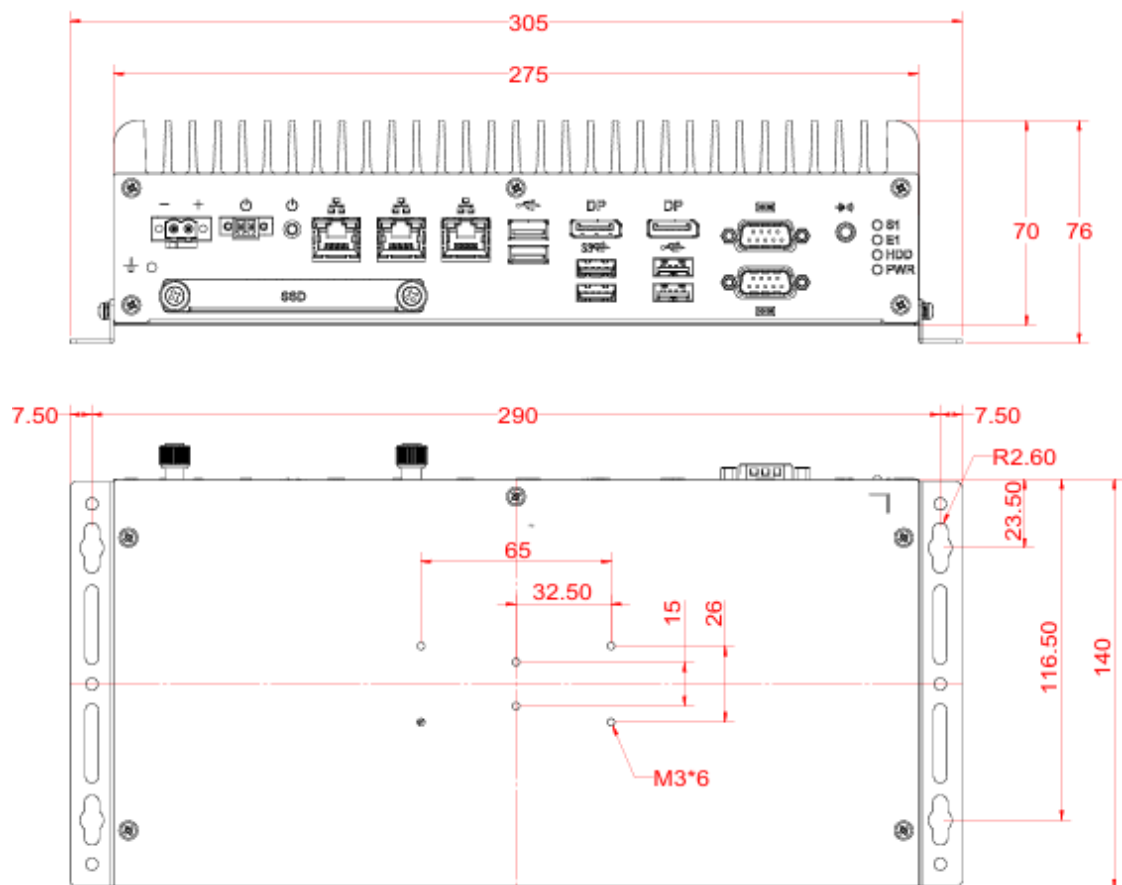

Unit: mm

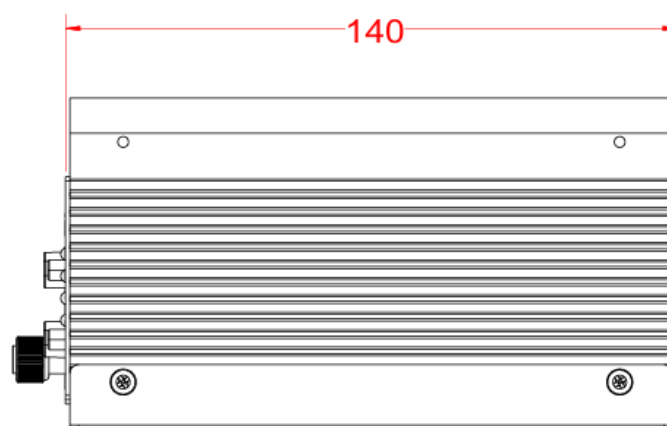

## Chapter 2


# Hardware Configuration

The information provided in this chapter includes:

- Essential installations before you begin
- Information and locations of connectors

## 2.1 Hardware Installations

Remove and replace the bottom cover for the installation / replacement of memory module and M.2 socket devices. Release the 6 screws shown below.

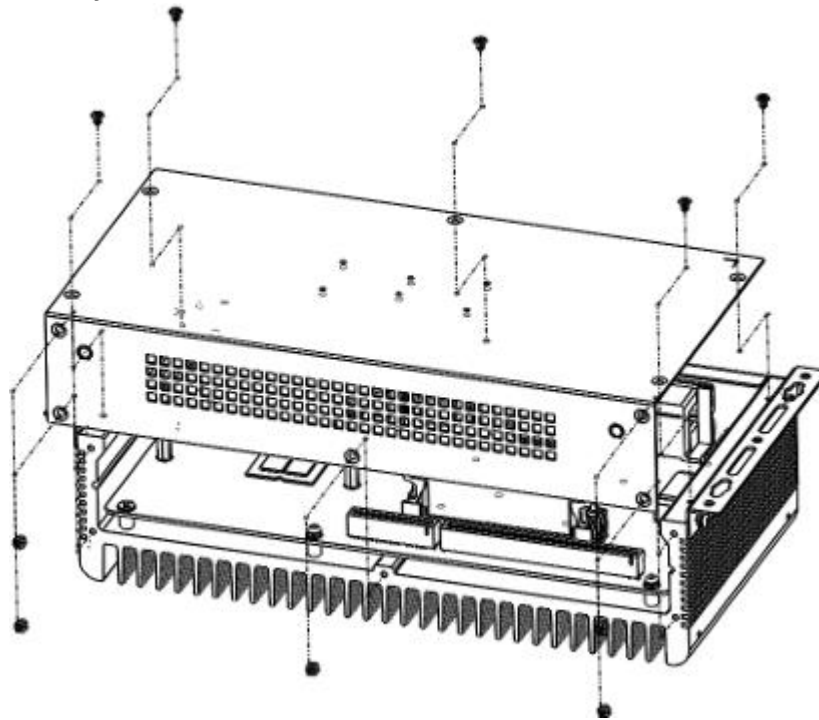


### 2.1.1 Memory Installation / Replacement

1. After removing the bottom cover, locate the memory slots.
2. Press the ejector tab of the memory slot outwards with your fingertips.




3. Hold the memory module and align the key of the module with that on the memory slot.
4. Gently push the module in an upright position until the ejector tabs of the memory slot close to hold the module in place when the module touches the bottom of the slot.




To remove the module, press the ejector tabs outwards with your fingertips to eject the module.

### 2.1.2 M.2 Installation / Replacement

1. After removing the bottom cover, locate the M.2 sockets.
2. There are two M.2 sockets available on AMS320 (J17: E-Key and J9: B-Key), as shown in the picture below. Locate the desired socket to be used for installation/replacement of M.2 devices to proceed.

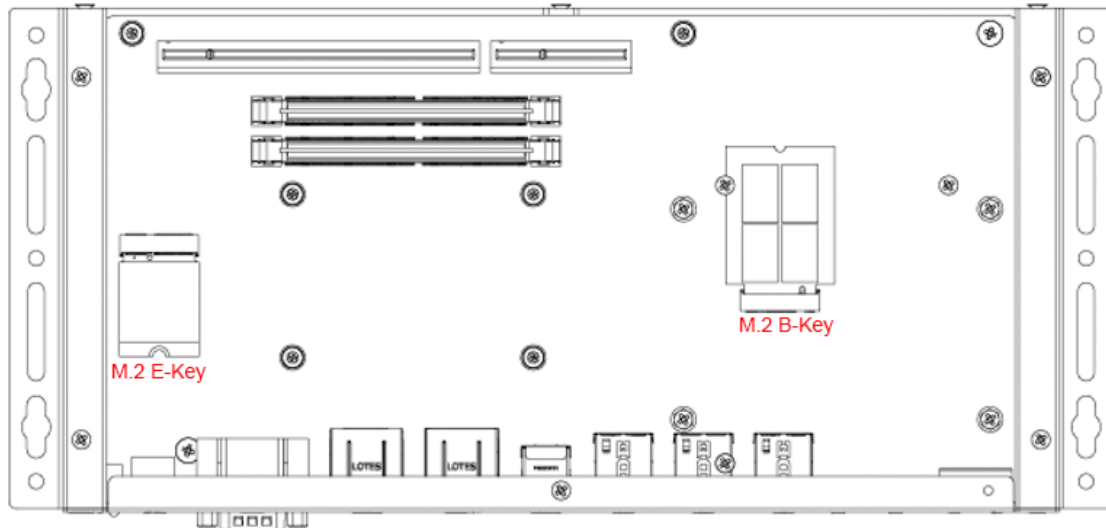


3. To install or replace a card, align the key of the card to the interface, and insert the card slantwise. Push the card down and fix it with a flat head screw.

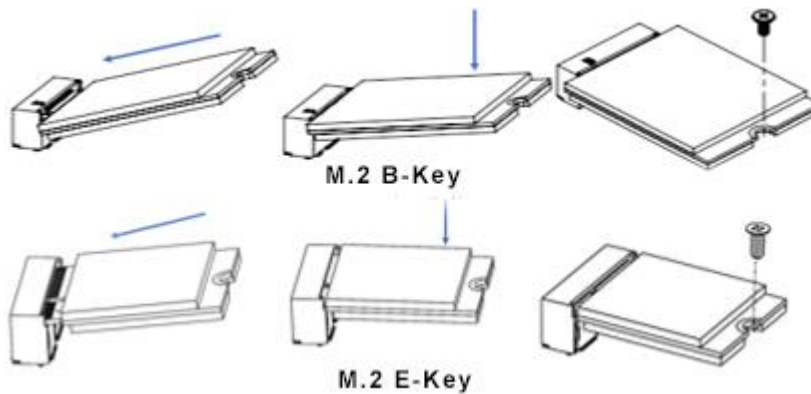


### 2.1.3 SSD Installation

1. To install or replace the SSD, follow the instructions below.

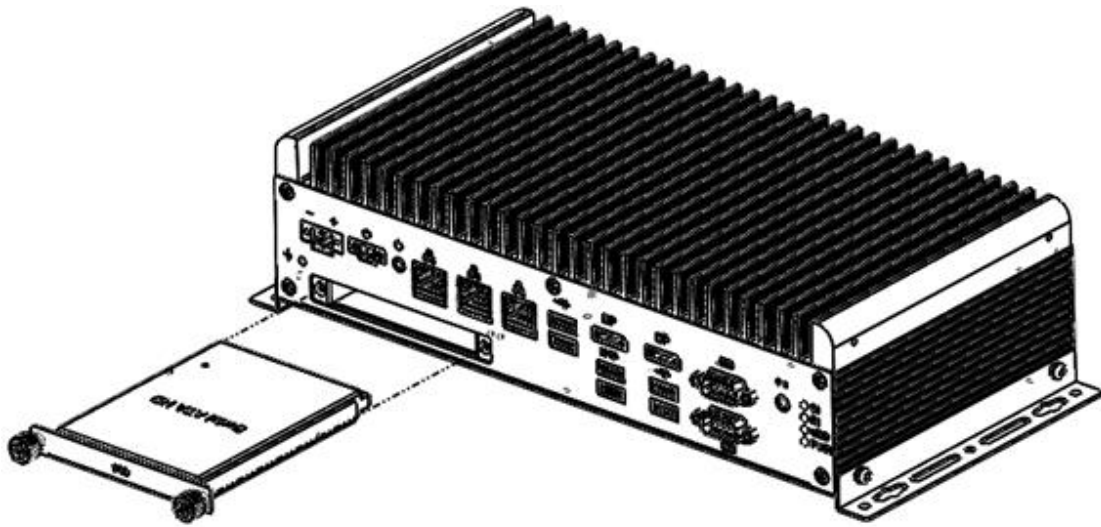

Release 2 screws to pull out the SSD tray.

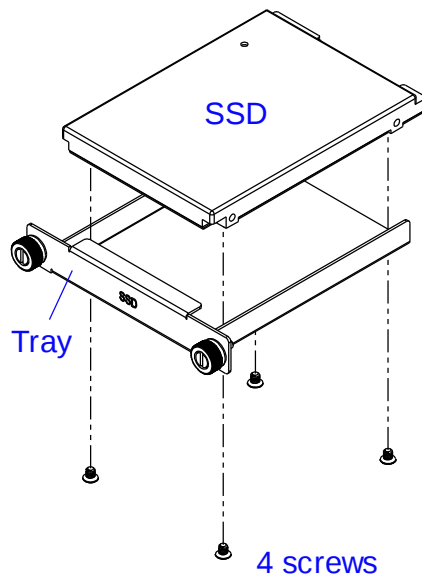


Remove/replace the four screws shown to remove or install the SSD.


### 2.1.4 WiFi / 4G / 5G Antenna Installation

Thread the WiFi / 4G / 5G antenna extension cable through an antenna hole of the front I/O cover and fasten the antenna as shown below. Then apply adhesive to the edge of the hex nut behind the front I/O cover to prevent the extension cable from falling if the cable becomes loose.

1. Thread and fasten the hex nut and the washer. Then install the antenna.

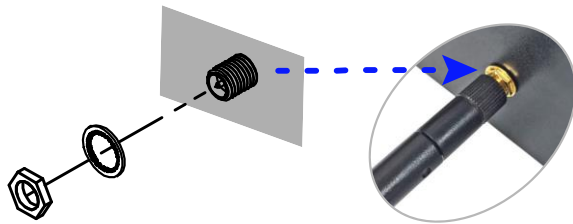

2. Apply adhesive around here.

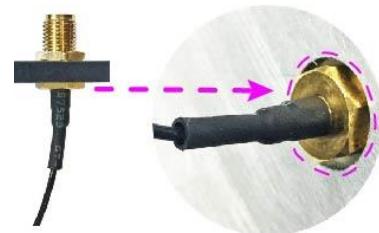

---


**Info:** The diameter of the nut is around 6.35 mm (0.25"-36UNC).

---

### 2.1.5 Mounting Installation

When mounting the AMS320 to any type of surface, ensure that you have enough room for power and signal cable routing, and have good ventilation. The method of mounting must be able to support weight of the device plus the suspension weight of all the cables to be attached to the system.


The AMS320 system comes with a set of wall mount kit and four round head screws that are to be used in securing the mounting brackets to the main unit, as shown in the picture below.






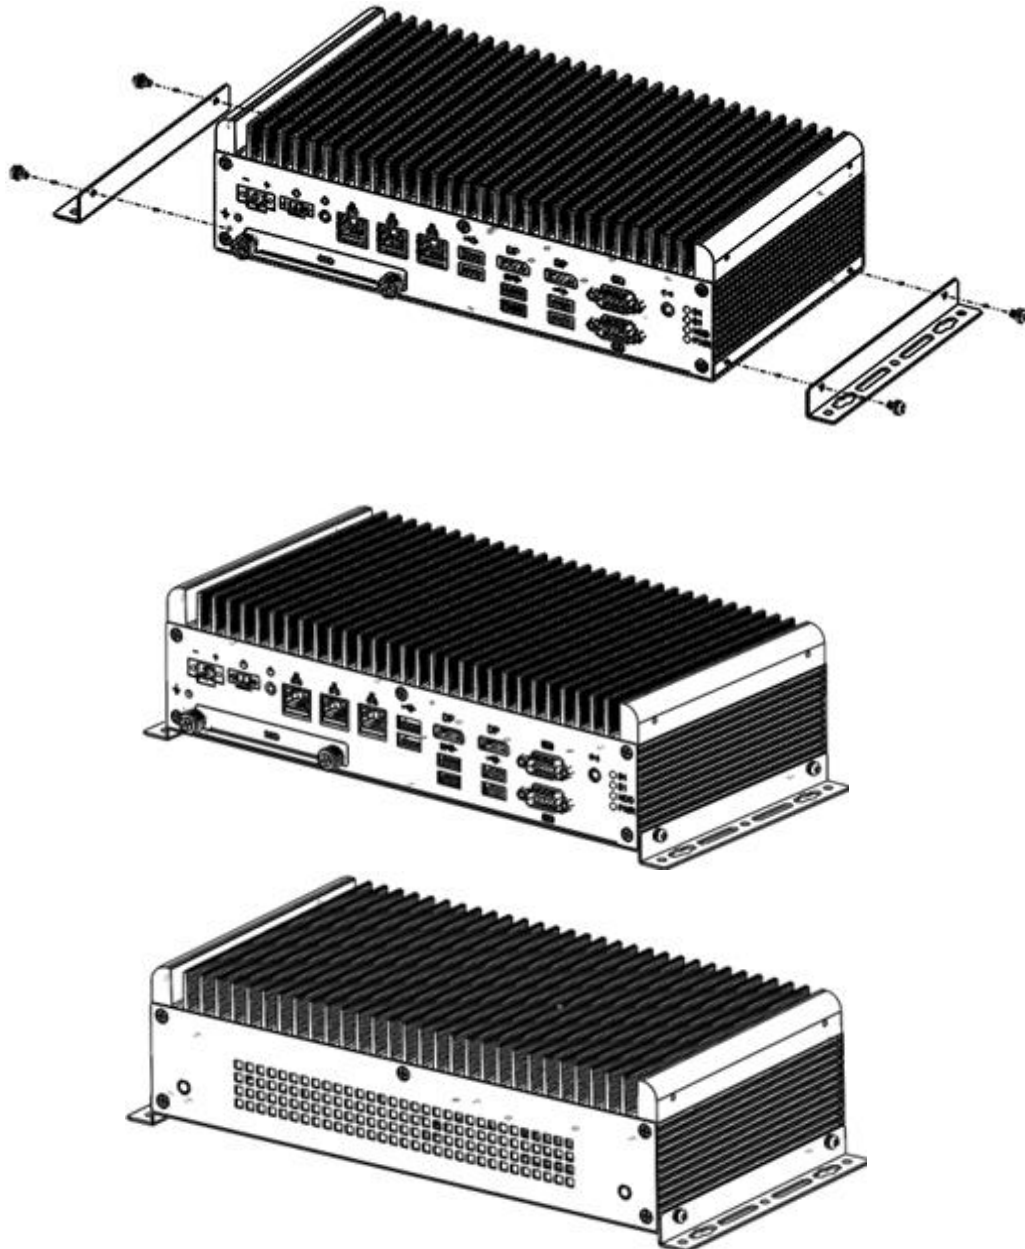


## 2.2 Jumper Setting

Set up and configure your device by using jumpers for various settings and features according to your needs and applications. Contact your supplier if you have doubts about the best configuration for your use.

Jumpers are short-length conductors consisting of several metal pins with a non-conductive base mounted on the circuit board. Jumper caps are used to have the functions and features enabled or disabled. If a jumper has 3 pins, you can connect either PIN1 to PIN2 or PIN2 to PIN3 by shorting.

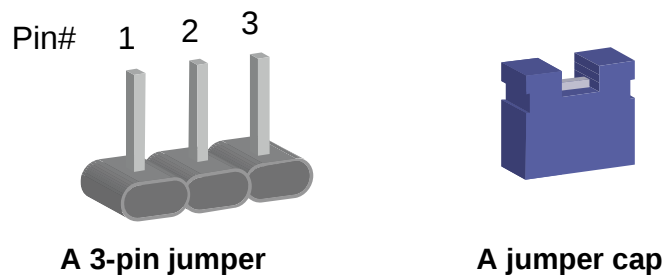


| Pin        | Oblique view                                                                        | Illustration                                                                                 |
|------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| Open       |  | <br>1 2 3 |
| 1-2 closed |  | <br>1 2 3 |
| 2-3 closed |  | <br>1 2 3 |

When two pins of a jumper are encased in a jumper cap, this jumper is **closed**, i.e. turned **On**.

When a jumper cap is removed from two jumper pins, this jumper is **open**, i.e. turned **Off**.

## 2.3 Jumper & Connector Locations on Motherboard


Motherboard: MB320

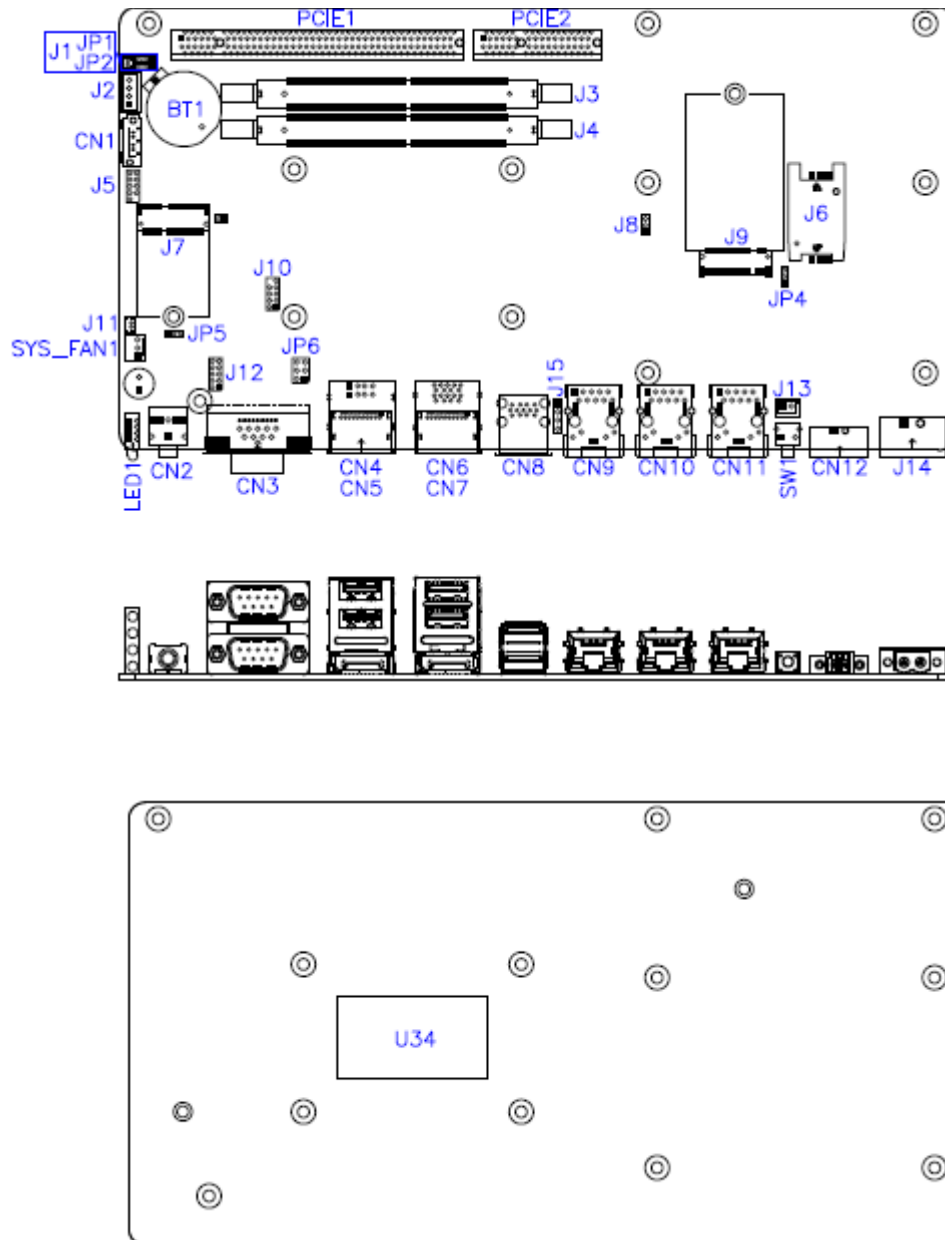

## 2.4 Jumpers Quick Reference


| Function               | Jumper |
|------------------------|--------|
| Clear RTC              | JP1    |
| Clear ME               | JP2    |
| M.2 B-Key Support Type | JP4    |
| AT/ATX Mode Setting    | JP5    |

### 2.4.1 Clear RTC (JP1)

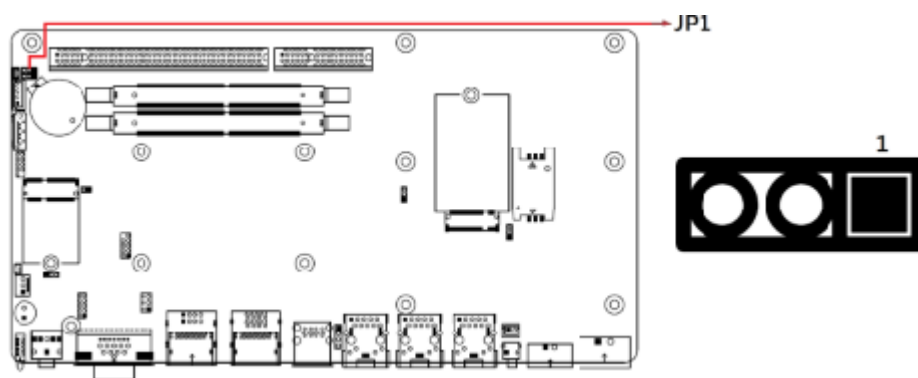


| Function         | Pin        | Illustration |
|------------------|------------|--------------|
| Normal (default) | 1-2 Closed | <br>1        |
| Clear CMOS       | 2-3 Closed | <br>1        |



### 2.4.2 Clear ME (JP2)

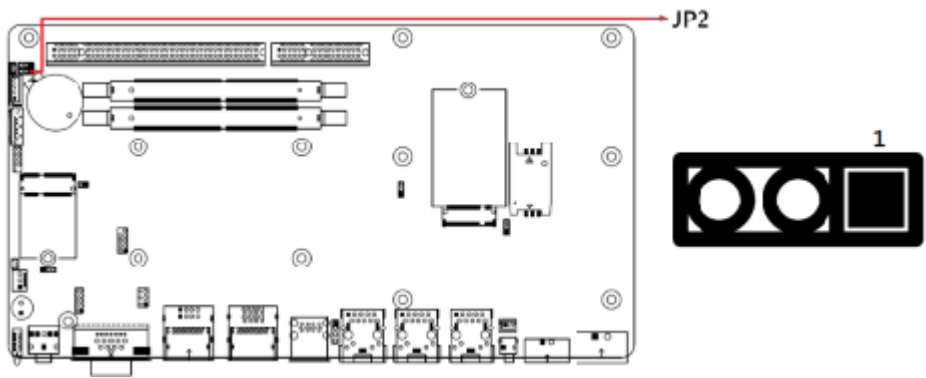


| Function            | Pin           | Illustration                                                                           |
|---------------------|---------------|----------------------------------------------------------------------------------------|
| Normal<br>(default) | 1-2<br>Closed | <br>1 |
| Clear ME            | 2-3<br>Closed | <br>1 |

### 2.4.3 M.2 B-Key Support Type (JP4)

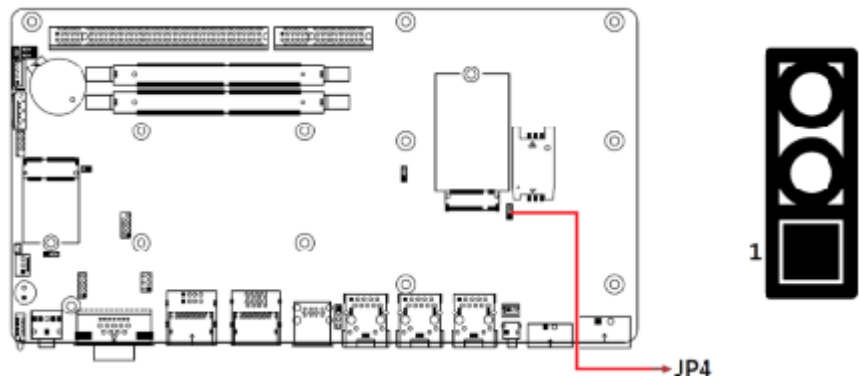

| Function | Pin        | Illustration                                                                           |
|----------|------------|----------------------------------------------------------------------------------------|
| USB      | 1-2 Closed | <br>1 |
| PCIe     | 2-3 Closed | <br>1 |


2.4.4 AT/ATX Mode Setting (JP5)

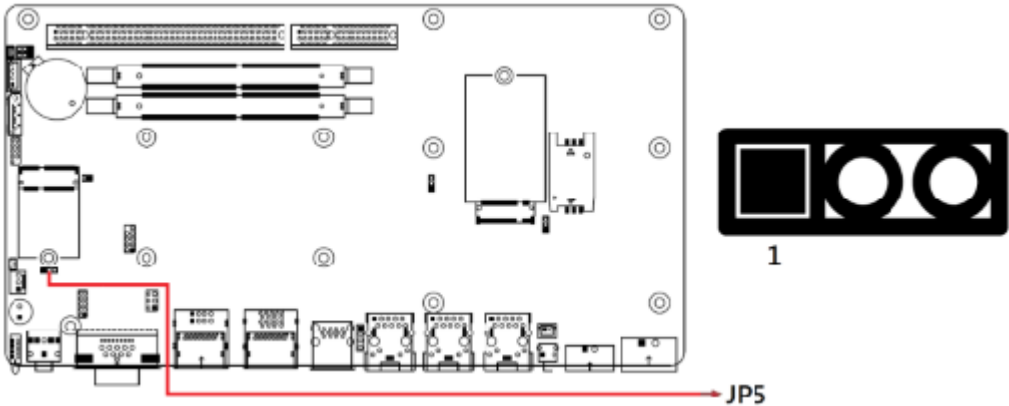


| Function              | Pin        | Illustration                                                                           |
|-----------------------|------------|----------------------------------------------------------------------------------------|
| ATX Mode<br>(default) | 1-2 Closed | <br>1 |
| AT Mode               | 2-3 Closed | <br>1 |

## 2.5 Connectors Quick Reference

| Function                         | Connector       |
|----------------------------------|-----------------|
| SATA Connector                   | CN1             |
| Line Out Jack                    | CN2             |
| COM1 / 2 Ports                   | CN3             |
| USB 2.0 Ports                    | CN4             |
| DisplayPort Ports                | CN5,CN7         |
| USB 3.1 Ports                    | CN6,CN8         |
| I226V GbE Ports                  | CN9, CN10, CN11 |
| Terminal Block for Remote Access | CN12            |
| Power Button                     | SW1             |
| RTC Battery Connector            | J1              |
| SATA Power Connector             | J2              |
| SO-DIMM Sockets                  | J3, J4          |
| SPI Debug Header                 | J5              |
| SIM Card Slot for 4G/5G          | J6              |
| M.2 E-Key Socket                 | J7              |
| M.2 B-Key Socket                 | J9              |
| ESPI Debug Header                | J10             |
| Reset Header                     | J11             |
| Digital IO Connector             | J12             |
| AT On/Off Switch                 | J13             |
| DC_IN Connector                  | J14             |

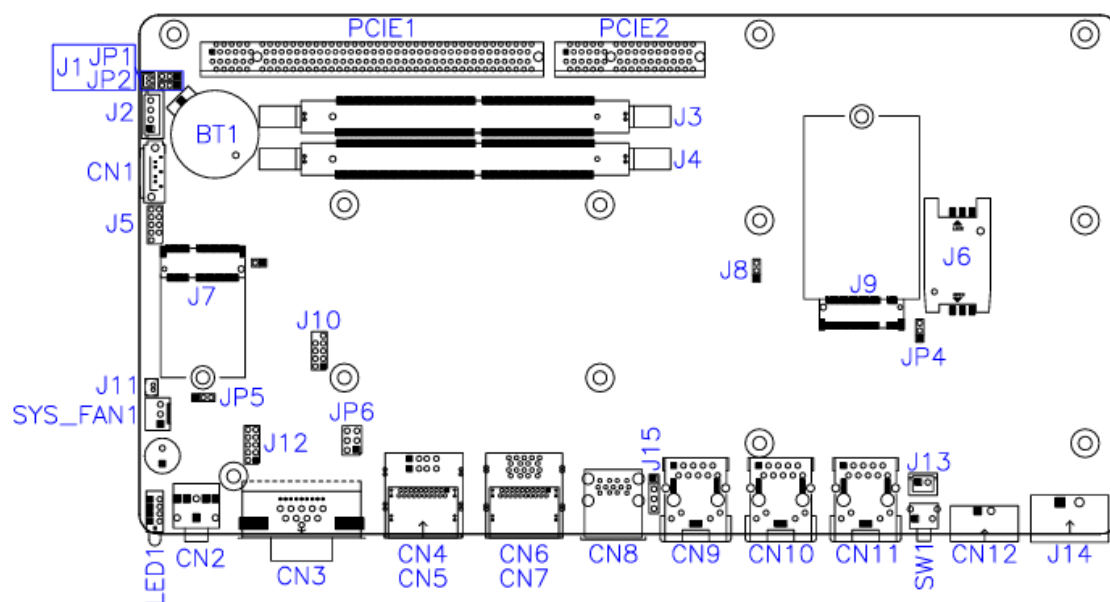

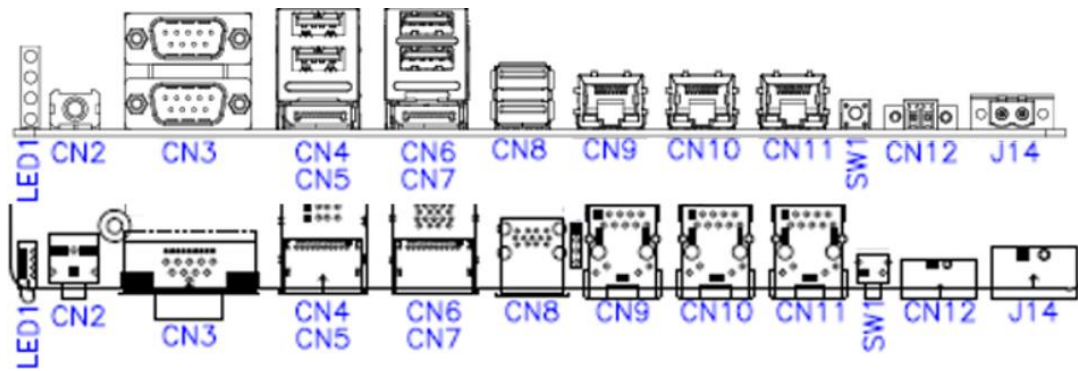

### 2.5.1 LED1: 4x LED Indicators (Power, HDD, RTC battery low, Programmable)

- Green (Power LED)
- Red (HDD LED)
- Blue (RTC battery low LED)
- Green/yellow (GPIO LED)

### 2.5.2 CN2: Line Out Jack

### 2.5.3 CN3: COM1 / COM2 Ports

### 2.5.4 CN4: USB 2.0 Ports


### 2.5.5 CN5, CN7: DisplayPort Ports

### 2.5.6 CN6, CN8: USB 3.1 Ports

### 2.5.7 CN9, CN10, CN11: I226V GbE Ports


### 2.5.8 CN12 : Terminal Block Connector for Remote Access

### 2.5.9 J14: DC\_IN Connector (2-pin terminal block)

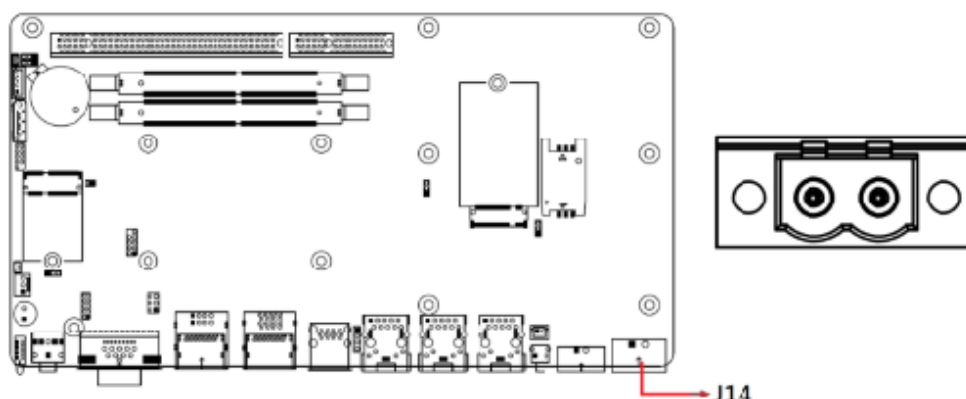


| Pin | Signal Name | Pin | Signal Name |
|-----|-------------|-----|-------------|
| 1   | 24V         | 2   | Ground      |

2.5.10 J1: RTC Battery Connector

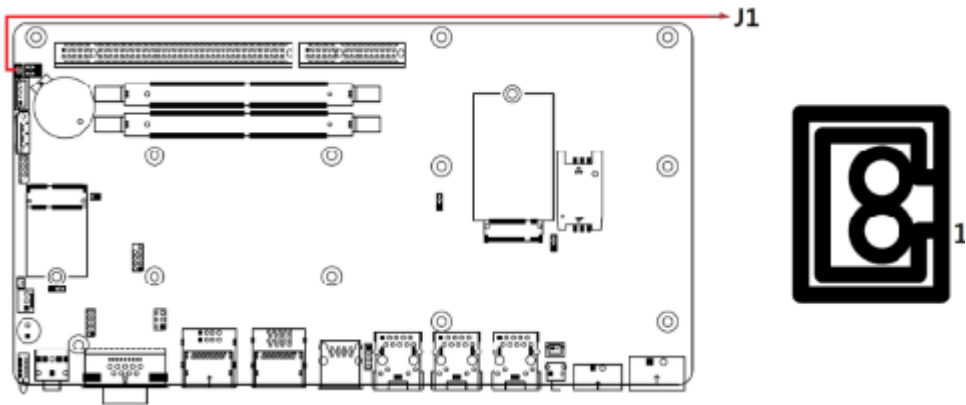


2.5.11 J2: SATA Power Connector

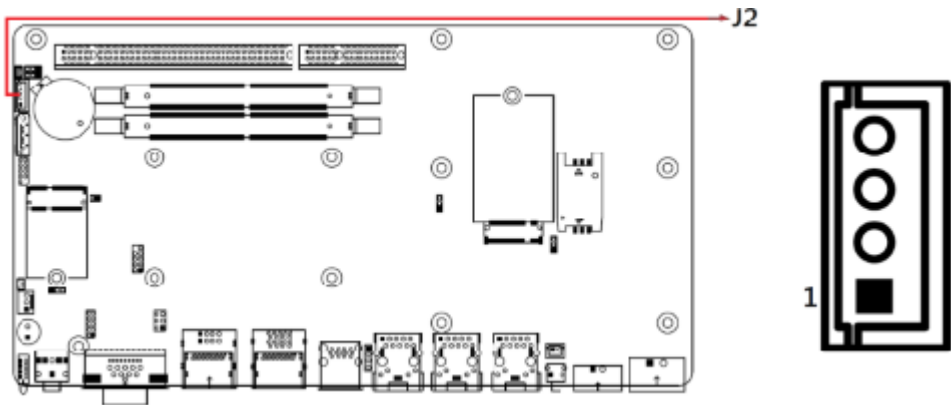


| Pin | Signal Name | Pin | Signal Name |
|-----|-------------|-----|-------------|
| 1   | +5V         | 3   | Ground      |
| 2   | Ground      | 4   | +12V        |


2.5.12 J3, J4: SO-DIMM Sockets

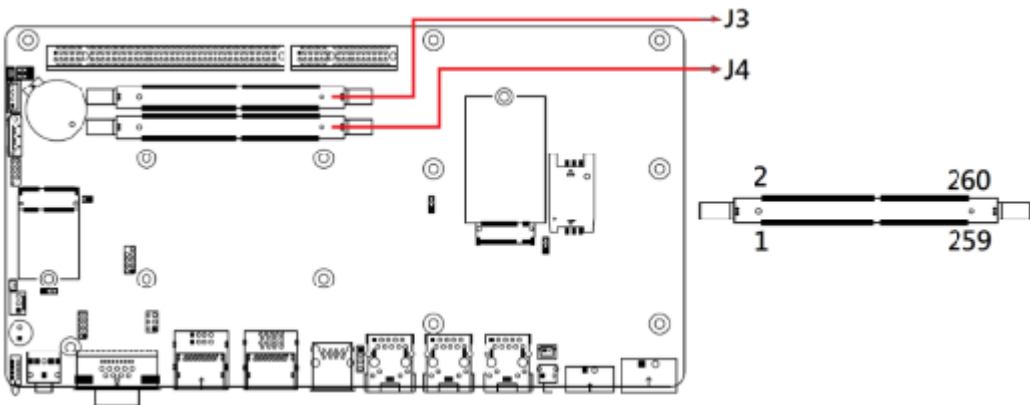


### 2.5.13 J5: SPI Debug Header

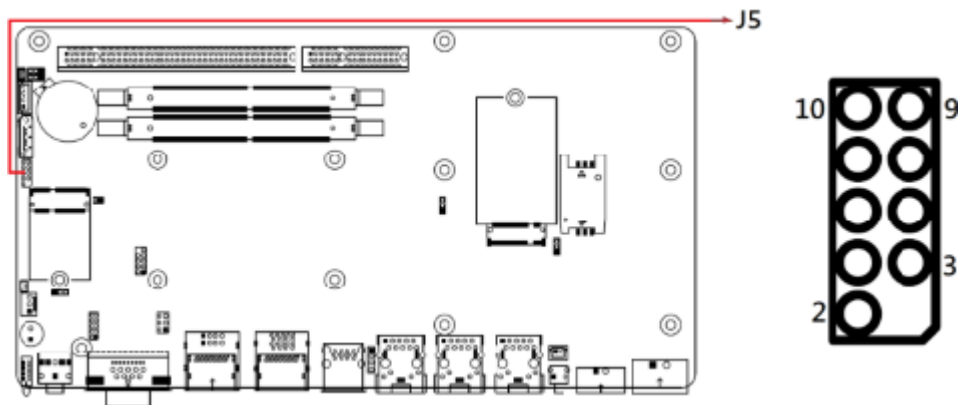

### 2.5.14 J6: SIM Card Slot for 4G/5G

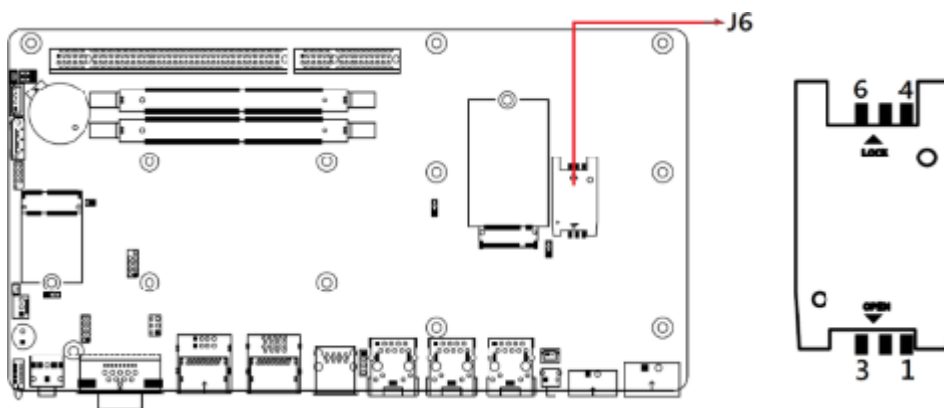


### 2.5.15 J7: M.2 E-Key Socket

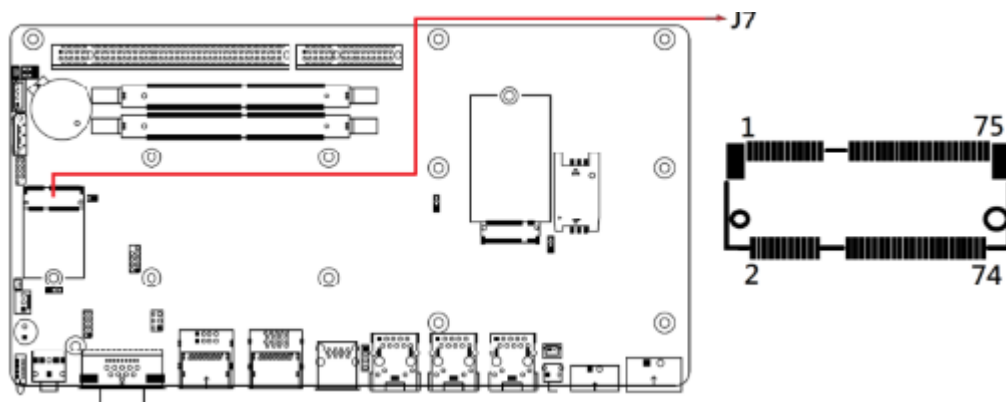


*Note: J7 supports USB 2.0 & PCIe (for wifi module)*

### 2.5.16 J9: M.2 B-Key Socket

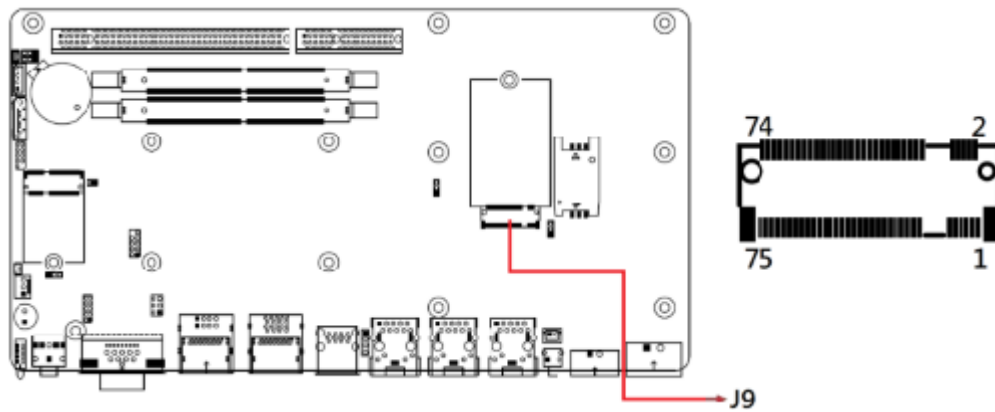


*Note: J9 supports USB 2.0 & 3.0 & PCIe (for 4G / 5G module)*


### 2.5.17 J10: ESPI Debug Header

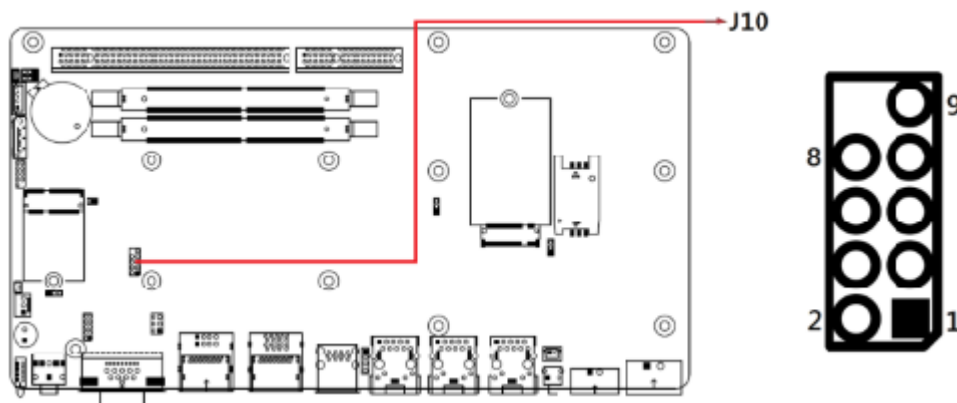


### 2.5.18 J11: Reset Header

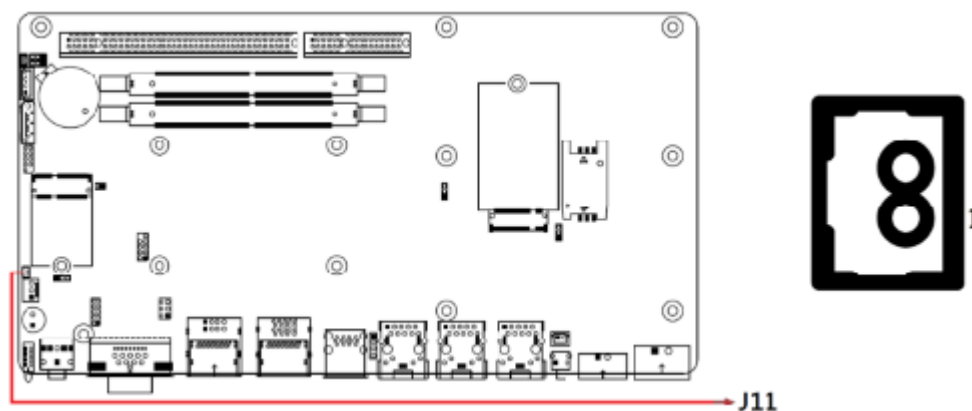

### 2.5.19 J12: Digital IO Connector

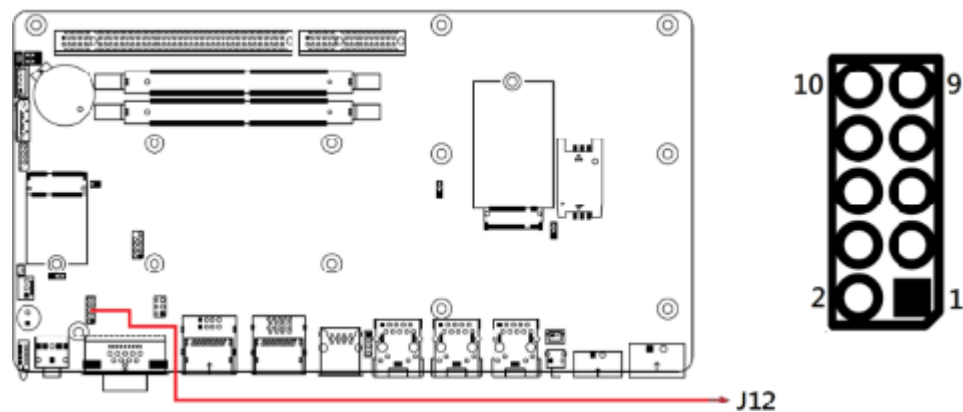

### 2.5.20 J13 : AT On/Off Switch

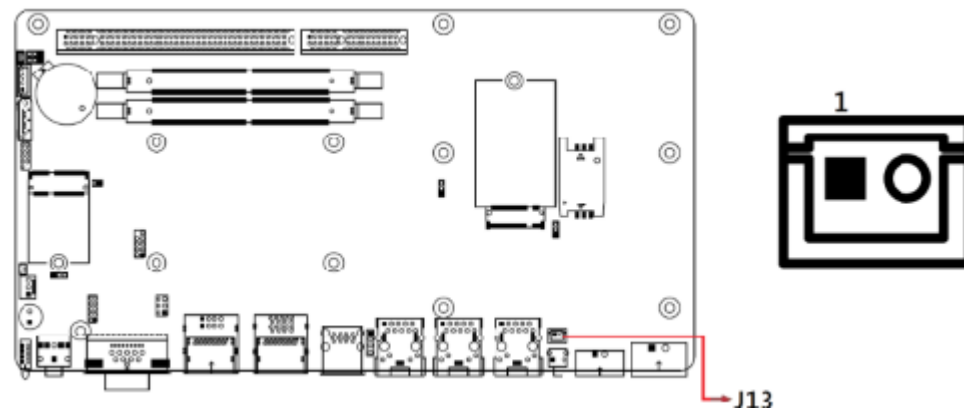

| Pin | Assignment |
|-----|------------|
| 1   | SHDN#      |
| 2   | Ground     |

## Chapter 3

# Driver Installation

The information provided in this chapter includes:

- Intel® Chipset Software Installation Utility
- Graphics Driver Installation
- HD Audio Driver Installation
- LAN Driver Installation
- Intel® ME Drivers Installation
- Intel® Thunderbolt Drivers Installation

### 3.1 Introduction

This section describes the installation procedures for software drivers.

### 3.2 Intel® Chipset Software Installation Utility

The Intel® Chipset drivers should be installed first before the software drivers to install INF files for Plug & Play function for the chipset components. Follow the instructions below to complete the installation.


1. Go to the download page of the product. Copy the compressed drivers file to your computer. Double click the file to decompress it. Run “CDGuide” to go to the main drivers page as shown. Click **Intel** and then **Intel(R) TigerLake-U Chipset Drivers**.



2. Click **Intel(R) Chipset Software Installation Utility**.



3. When the *Welcome* screen to the Intel® Chipset Device Software appears, click **Next** to continue.
4. Accept the terms in the software license agreement.
5. On the *Readme File Information* screen, click **Install**.

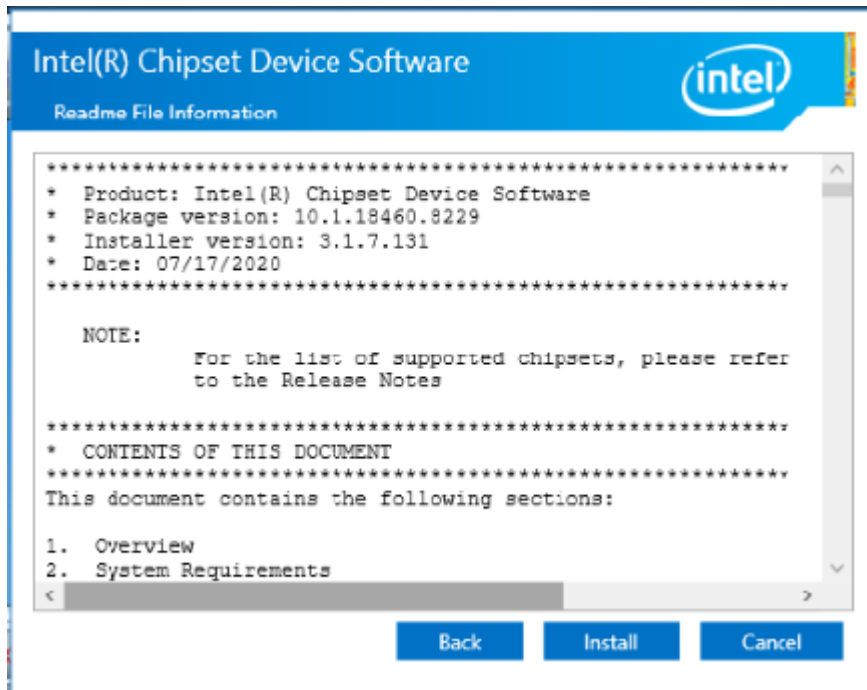


6. When Intel® Chipset Device Software has been completely installed, click **Finish** to complete the setup process.

### 3.3 Graphics Driver Installation

1. Click **Intel** and then **Intel(R) TigerLake-U Chipset Drivers**.
2. Click **Intel(R) HD Graphics Driver**.



3. When the *Welcome* screen appears, click **Next**.
4. Accept the terms in the license agreement and click **Yes**.
5. On the *Readme File Information* screen, click **Next**.

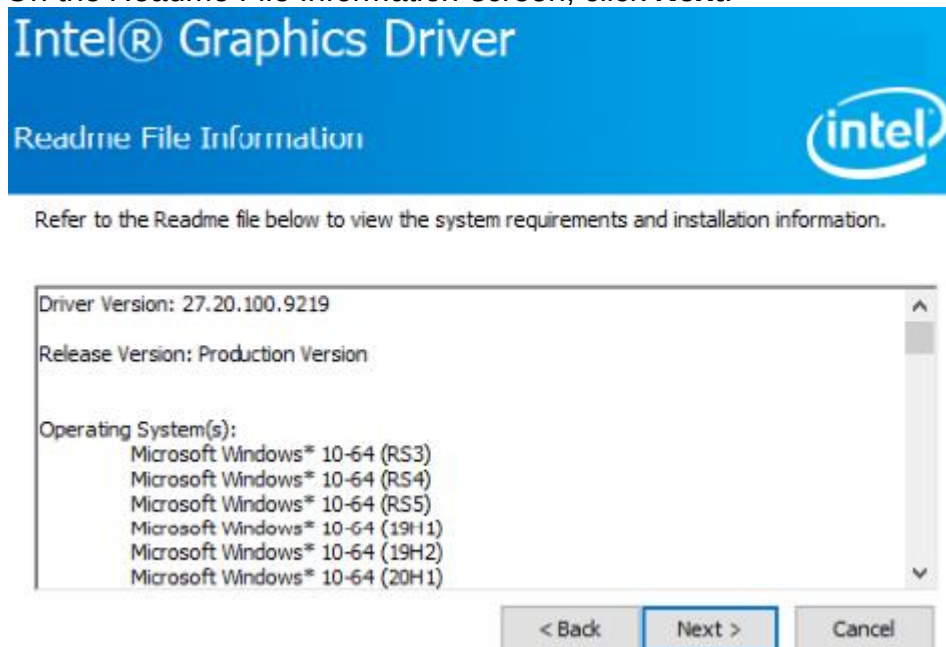

6. In the Setup Progress screen, click **Next**.
7. When Setup is Complete, click **Finish** to restart the computer.


### 3.4 HD Audio Driver Installation

1. Click **Intel** and then **Intel(R) TigerLake-U Chipset Drivers**.
2. Click **Realtek High Definition Audio Driver**.



3. On the *Welcome* screen of the InstallShield Wizard, click **Next**.
4. When InstallShield Wizard has completed the installation, restart the computer.

Realtek High Definition Audio Driver Setup (4.27) R2.79

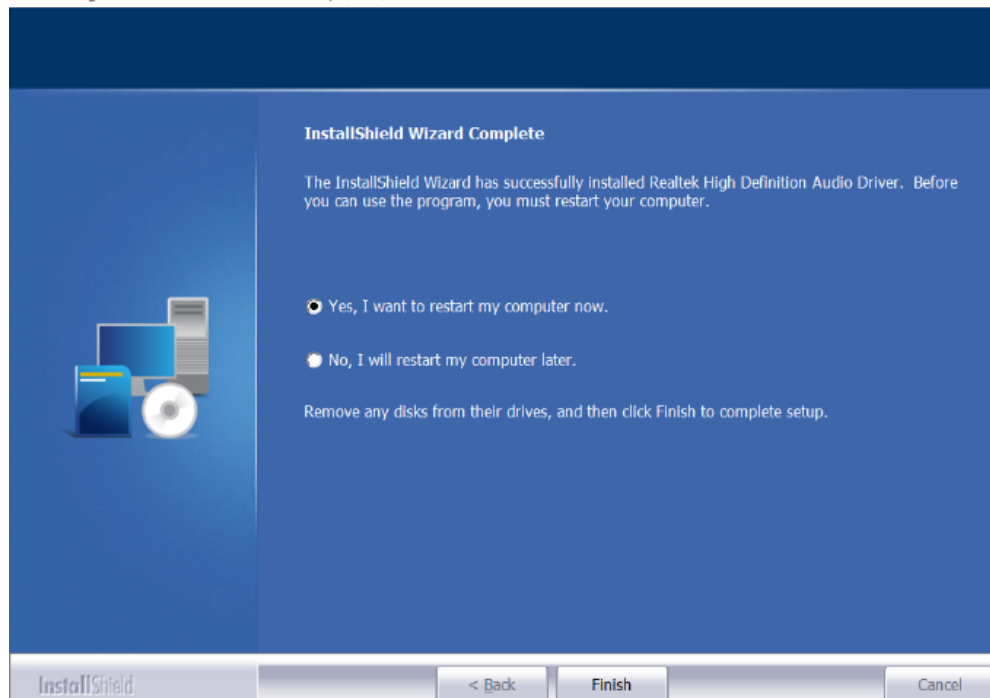


### 3.5 LAN Driver Installation

1. Click **Intel** and then **Intel(R) TigerLake-U Chipset Drivers**
2. Click **Intel(R) PRO LAN Network Drivers**..



3. Click **Install Drivers and Software**.

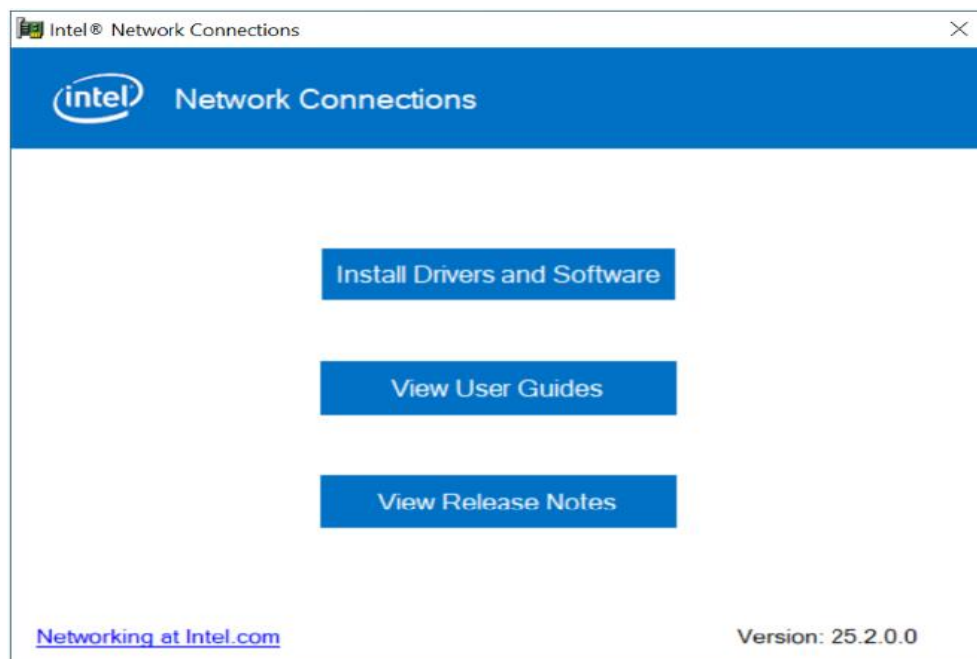


4. On the Welcome screen to the Install Wizard, click **Next**.
5. Accept the terms in the License Agreement and click **Next**.
6. Click **Next** in the Setup Options screen.
7. Install Wizard is now ready to install the program, click **Install**.
8. When Install Wizard has completed the installation, click **Finish**.

### 3.6 Intel® Management Engine Driver Installation


1. Click **Intel** and then **Intel(R) TigerLake-U Chipset Drivers**.
2. Click **Intel(R) ME 15.x Drivers**.



3. When the *Welcome* screen appears, click **Next** to continue.

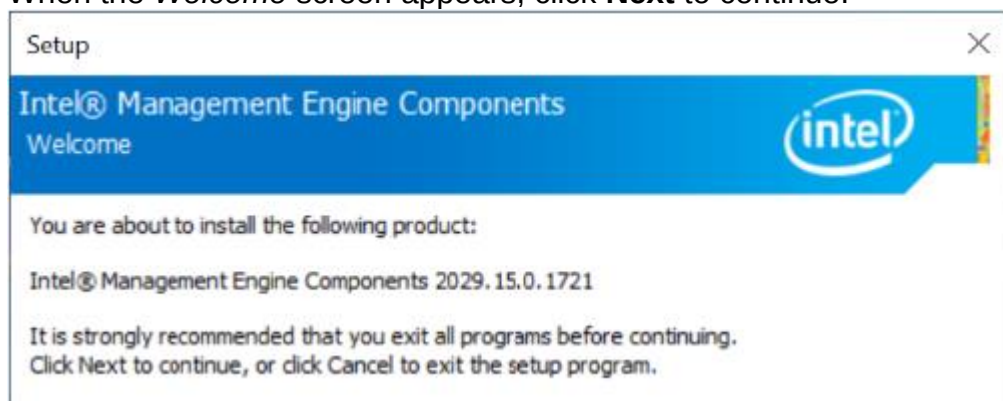

4. Accept the terms in the license agreement and click **Next** to continue.
5. Click **Next** to install to the default folder, or click **Change** to choose another destination folder.
6. When the Intel Management Engine Components has been successfully installed, click **Finish**.

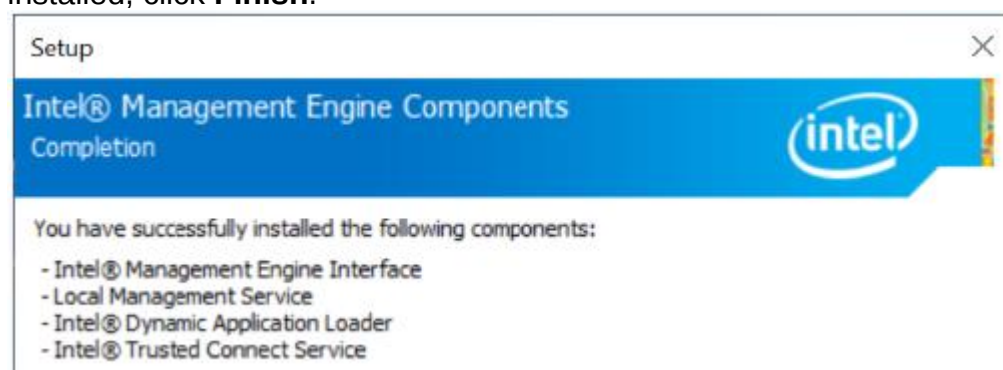

### 3.7 Intel® Thunderbolt Drivers Installation

1. Click **Intel** and then **Intel(R) TigerLake-U Chipset Drivers**.
2. Click **Intel(R) Thunderbolt Drivers**.



3. Agree to the license terms and conditions. Click **Install** to continue.



4. When the installation has been successfully completed, click **Restart**.

## Chapter 4

# BIOS Setup

This chapter describes the different settings available in the AMI BIOS that comes with the board. The topics covered in this chapter are as follows:

- Introduction
- BIOS Setup
- Main Settings
- Advanced Settings
- Chipset Settings
- Security Settings
- Boot Settings
- Save & Exit Settings

## 4.1 Introduction

The BIOS (Basic Input/Output System) installed in the ROM of your computer system supports Intel® processors. The BIOS provides critical low-level support for standard devices such as disk drives, serial ports and parallel ports. It also provides password protection as well as special support for detailed fine-tuning of the chipset controlling the entire system.

## 4.2 BIOS Setup

The BIOS provides a Setup utility program for specifying the system configurations and settings. The BIOS ROM of the system stores the Setup utility. When you turn on the computer, the BIOS is immediately activated. Press the <Del> key immediately allows you to enter the Setup utility. If you are a little bit late pressing the <Del> key, POST (Power On Self Test) will continue with its test routines, thus preventing you from invoking the Setup.

If you still need to enter Setup, restart the system by pressing the "Reset" button or simultaneously pressing the <Ctrl>, <Alt> and <Delete> keys. You can also restart by turning the system Off and back On again.

The following message will appear on the screen:

```
Press <DEL> to Enter Setup
```

In general, press the arrow keys to highlight items, <Enter> to select, the <PgUp> and <PgDn> keys to change entries, <F1> for help, and <Esc> to quit.

When you enter the BIOS Setup utility, the *Main Menu* screen will appear on the screen. The Main Menu allows you to select from various setup functions and exit choices.


---

**Warning:** It is strongly recommended that you avoid making any changes to the chipset defaults.

These defaults have been carefully chosen by both AMI and your system manufacturer to provide the absolute maximum performance and reliability. Changing the defaults could make the system unstable and crash in some cases.

---


### 4.3 Main Settings

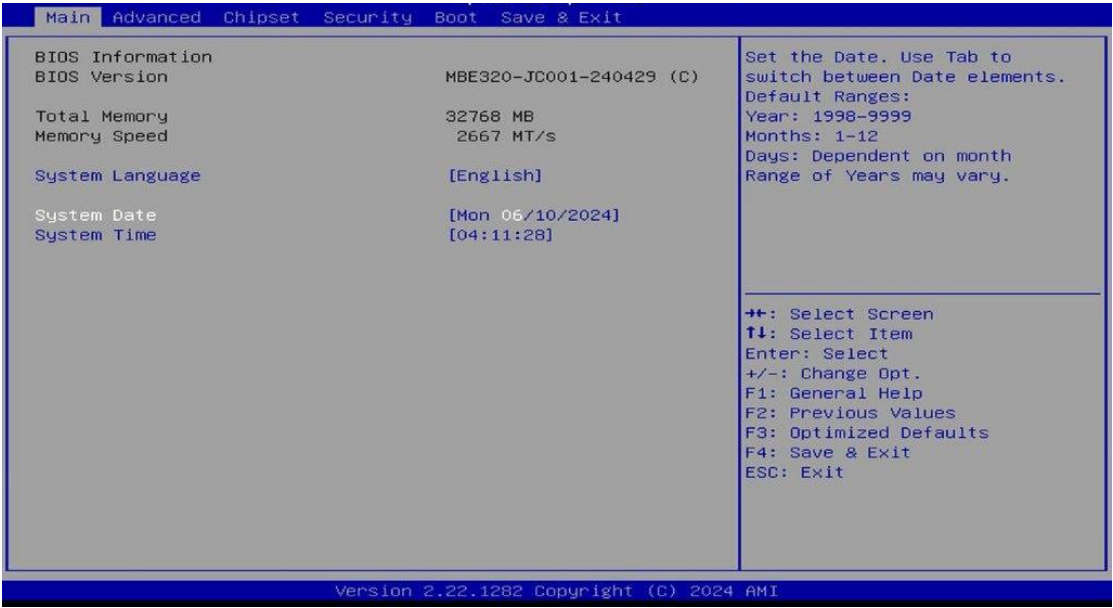

| BIOS Setting | Description                                                          |
|--------------|----------------------------------------------------------------------|
| System Date  | Sets the date.<br>Use the <Tab> key to switch between date elements. |
| System Time  | Set the time.<br>Use the <Tab> key to switch between time elements.  |


## 4.4 Advanced Settings

This section allows you to configure, improve your system and allows you to set up some system features according to your preference.

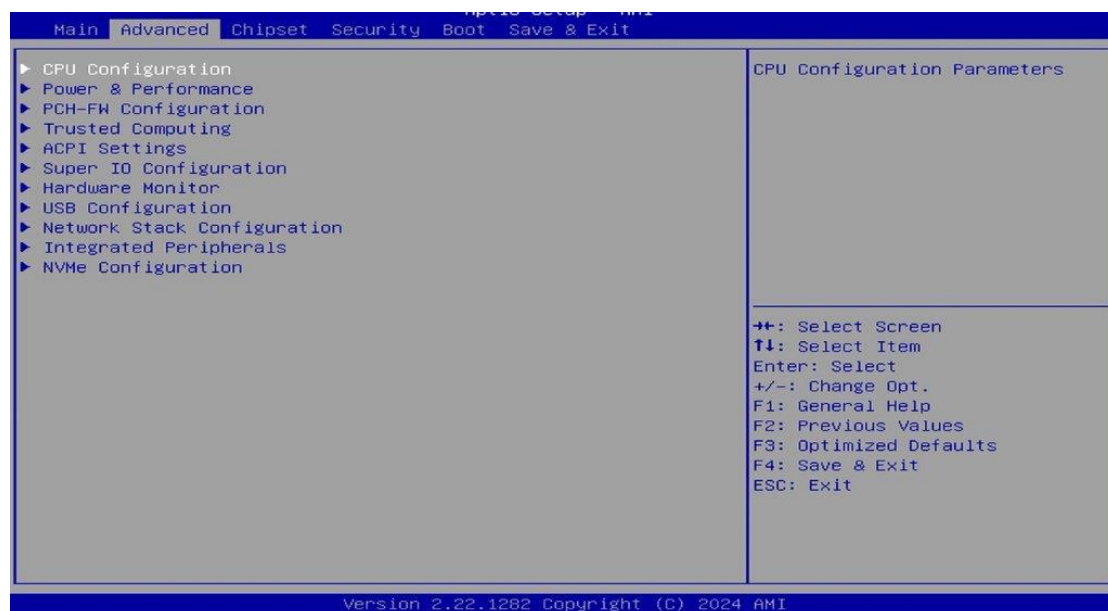


| BIOS Setting                | Description                                         |
|-----------------------------|-----------------------------------------------------|
| CPU Configuration           | Displays CPU configuration parameters.              |
| Power & Performance         | Shows power and performance options.                |
| PCH-FW Configuration        | Configures management engine technology parameters. |
| Trusted Computing           | Configures management engine technology parameters. |
| ACPI Settings               | Displays system ACPI parameters.                    |
| Super IO Configuration      | Displays super IO chip parameters.                  |
| Hardware Monitor            | Shows super IO monitor hardware status.             |
| Network Stack Configuration | Enable/Disable UEFI Network Stack.                  |
| USB Configuration           | Displays USB configuration parameters.              |
| NVMe Configuration          | Configures NVMe Device                              |

4.4.1 CPU Configuration

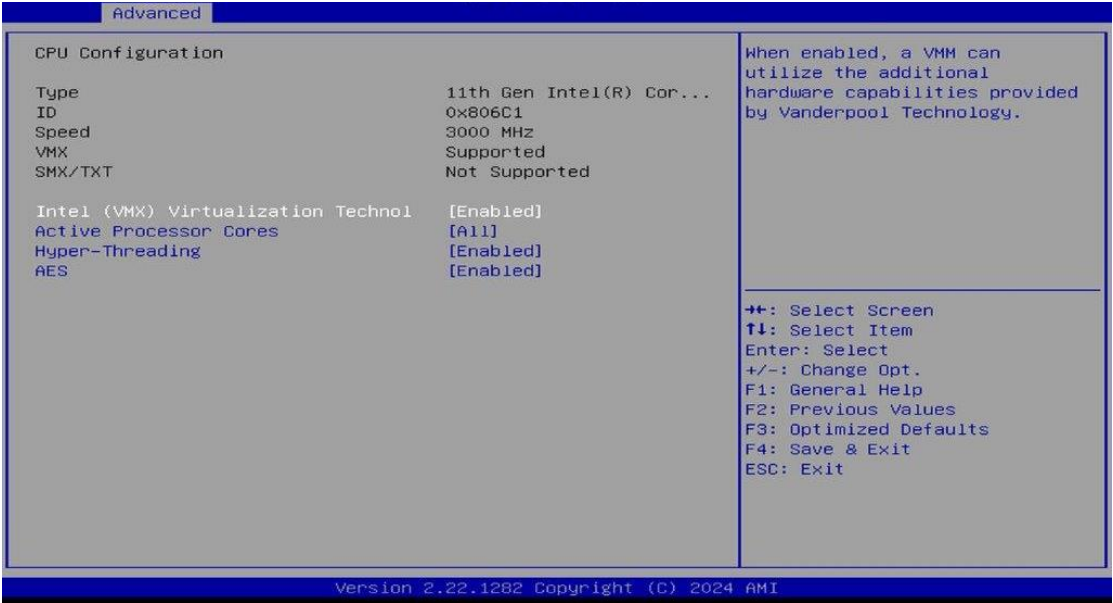

| BIOS Setting                          | Description                                                                                             |
|---------------------------------------|---------------------------------------------------------------------------------------------------------|
| Intel (VMX) Virtualization Technology | When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology. |
| Active Processor Cores                | Number of cores to enable in each processor package.                                                    |
| Hyper-Threading                       | Enable or Disable Hyper-Threading Technology.                                                           |
| AES                                   | Enables / Disables AES (Advanced Encryption Standard).                                                  |

### 4.4.2 Power & Performance

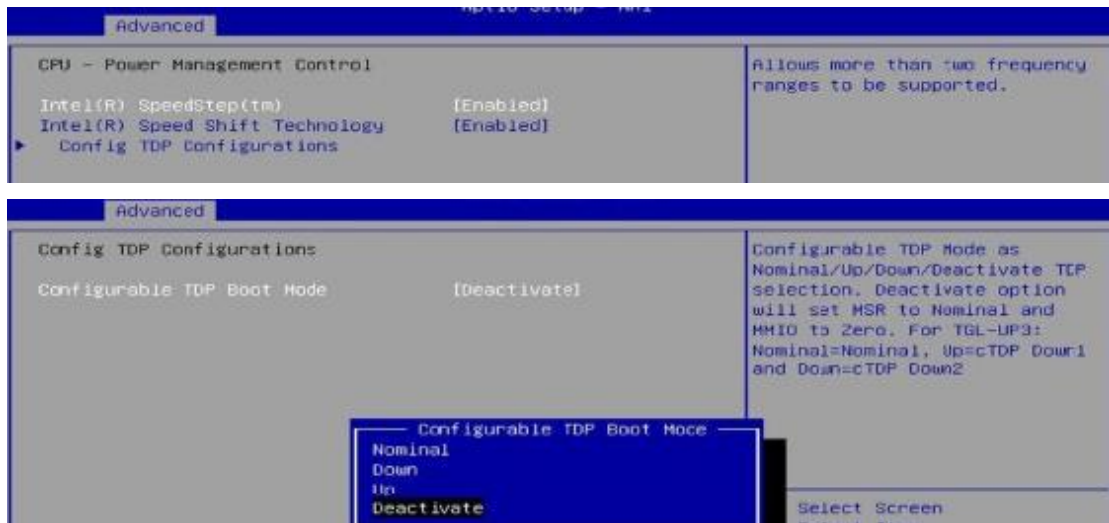

| BIOS Setting                   | Description                                                                                                                                                                                     |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU - Power Management Control | CPU - Power Management Control Options                                                                                                                                                          |
| Intel Speedstep                | Allows more than two frequency ranges to be supported                                                                                                                                           |
| Intel Speed Shift Technology   | Enable/Disable Intel Speed Shift Technology support. Enabling will expose the CPPC v2 interface to allow for hardware controlled P-states.                                                      |
| Config TDP Configurations      | cTDP (Assured Power) Configurations                                                                                                                                                             |
| Configurable TDP Boot Mode     | Configurable TDP Mode as Nominal/Up/Down/Deactiivate TDP selection. Deactivate option will set MSR to Nominal and MMIO to zero. For TCL UP3: Nominal=Nominal, Up=cTDP Down1 and Down=cTDP Down2 |

### 4.4.3 PCH-FW Configuration

| Advanced            |              |                                                                 |
|---------------------|--------------|-----------------------------------------------------------------|
| ME Firmware Version | 15.0.35.1951 | When Disabled ME will be put into ME Temporarily Disabled Mode. |
| ME Firmware Mode    | Normal Mode  |                                                                 |
| ME Firmware SKU     | Consumer SKU |                                                                 |
| ME State            | [Enabled]    |                                                                 |

| BIOS Setting | Description                                                      |
|--------------|------------------------------------------------------------------|
| ME State     | When disabled, ME will be put into ME Temporarily Disabled Mode. |

### 4.4.4 Trusted Computing

| Advanced                       |                     |                                                                                                                                                                                |
|--------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TPM 2.0 Device Found           | 600.7               | Enables or Disables BIOS support for security device. O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available.                          |
| Firmware Version:              | INTC                |                                                                                                                                                                                |
| Vendor:                        |                     |                                                                                                                                                                                |
| Security Device Support        | [Enable]            |                                                                                                                                                                                |
| Active PCR banks               | SHA256              |                                                                                                                                                                                |
| Available PCR banks            | SHA256, SHA384, SM3 |                                                                                                                                                                                |
| SHA256 PCR Bank                | [Enabled]           |                                                                                                                                                                                |
| SHA384 PCR Bank                | [Disabled]          |                                                                                                                                                                                |
| SM3_256 PCR Bank               | [Disabled]          | ++: Select Screen<br>T1: Select Item<br>Enter: Select<br>+/-: Change Opt.<br>F1: General Help<br>F2: Previous Values<br>F3: Optimized Defaults<br>F4: Save & Exit<br>ESC: Exit |
| Pending operation              | [None]              |                                                                                                                                                                                |
| Platform Hierarchy             | [Enabled]           |                                                                                                                                                                                |
| Storage Hierarchy              | [Enabled]           |                                                                                                                                                                                |
| Endorsement Hierarchy          | [Enabled]           |                                                                                                                                                                                |
| Physical Presence Spec Version | [1.3]               |                                                                                                                                                                                |
| TPM 2.0 InterfaceType          | [CRB]               |                                                                                                                                                                                |
| Device Select                  | [Auto]              |                                                                                                                                                                                |

| BIOS Setting                               | Description                                                                                                                                           |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Security Device Support                    | Enables or Disables BIOS support for security device. O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available. |
| SHA256 / SHA384 / SH3_256 PCR Bank         | Option: Enabled / Disabled                                                                                                                            |
| Pending operation                          | Schedule an operation for the security device.<br>Note: Your computer will reboot during restart in order to change state of security device.         |
| Platform / Storage / Endorsement Hierarchy | Enables / Disables the Platform / Storage / Endorsement Hierarchy                                                                                     |
| Physical Presence Spec Version             | Select to tell O.S to support PPI Spec Version (1.2 or 1.3). <b>Note:</b> Some HCK tests might not support 1.3.                                       |
| Device Select                              | Auto will support TPM 1.2 / 2.0 devices with the default set to TPM 2.0. If not found, TPM 1.2 devices will be enumerated                             |

4.4.5 ACPI Settings




| BIOS Setting       | Description                                                                                                            |
|--------------------|------------------------------------------------------------------------------------------------------------------------|
| Enable Hibernation | Enables / Disables the system ability to hibernate (OS/S4 Sleep State). This option may not be effective with some OS. |

4.4.6 Super IO Configuration




4.4.7     **Hardware Monitor**

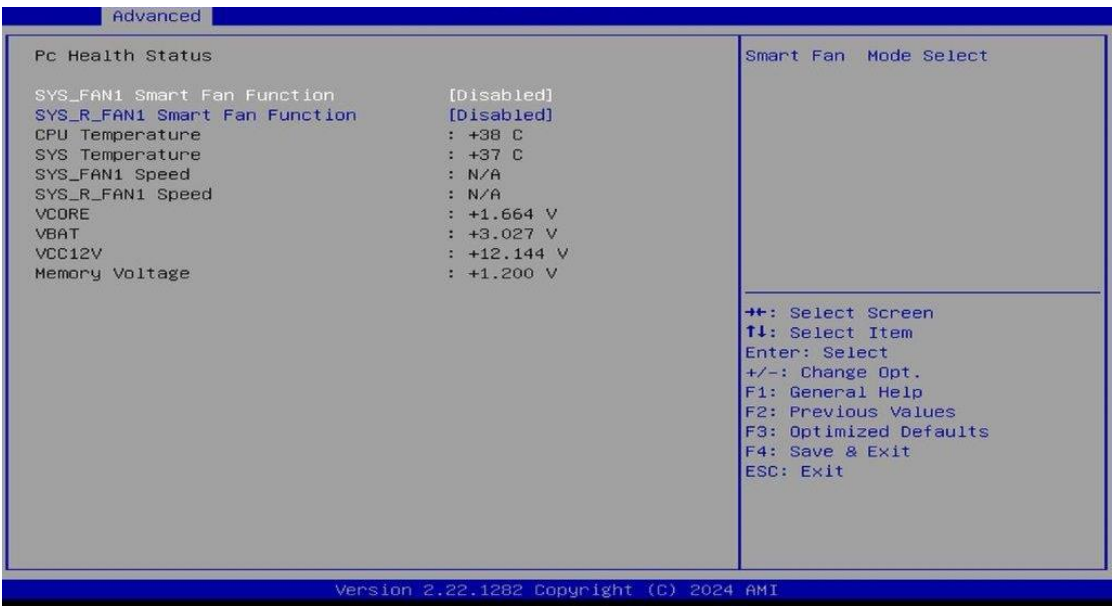

| BIOS Setting            | Description                                                                                                                                                                          |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Smart Fan Function      | Controls the CPU fan temperature by setting up a threshold temperature.<br><br>Options: Disabled (default),. 50 °C, 60 °C, 70 °C, 80 °C                                              |
| Temperatures / Voltages | These fields are the parameters of the hardware monitoring function feature of the motherboard. The values are read-only as monitored by the system and showing the PC health status |

### 4.4.8 USB Configuration

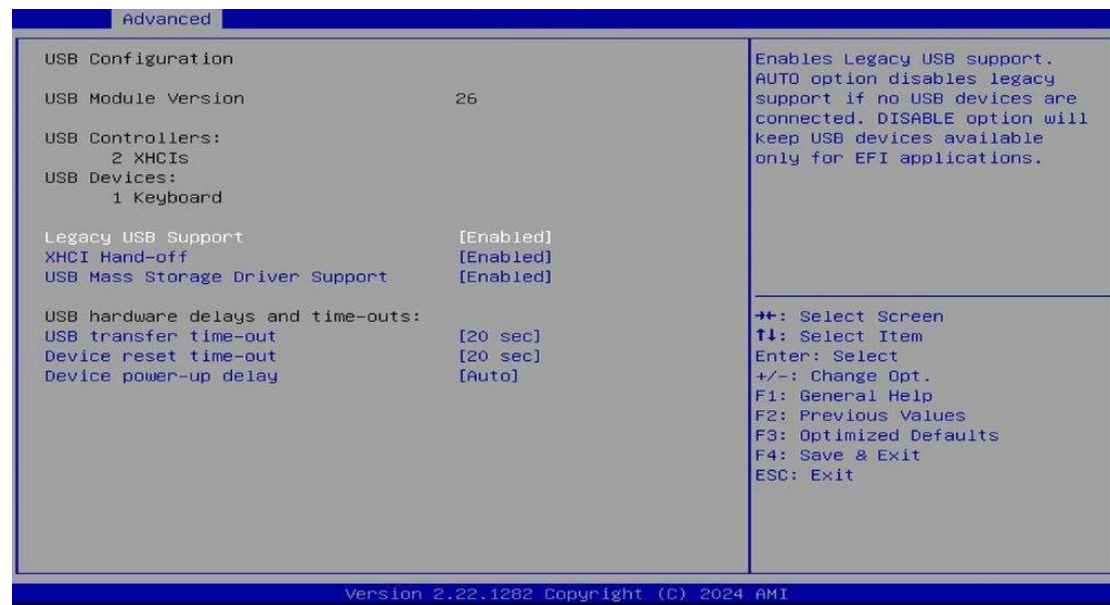


| BIOS Setting                    | Description                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Legacy USB Support              | <p>Enables / Disables Legacy USB support.</p> <ul style="list-style-type: none"> <li><b>Auto</b> disables legacy support if there is no USB device connected.</li> <li><b>Disable</b> keeps USB devices available only for EFI applications.</li> </ul> |
| XHCI Hand-pff                   | This is a workaround for OSeS without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.                                                                                                                                |
| USB Mass Storage Driver Support | Enables / Disables USB mass storage driver support.                                                                                                                                                                                                     |
| USB Transfer time-out           | Sets the time-out value 1, 5, 10 or 20 sec(s) for Control, Bulk, and Interrupt transfers.                                                                                                                                                               |
| Device reset time-out           | Sets the seconds (10, 20, 30, 40 secs) of delaying execution of start unit command to USB mass storage device.                                                                                                                                          |
| Device power-up delay           | Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses default value: for a Root port it is 100 ms, for a Hub port the delay is taken from Hub descriptor. Options: Auto, Manual                       |

4.4.9 Network Stack Configuration



| BIOS Setting  | Description                       |
|---------------|-----------------------------------|
| Network Stack | Enable/Disable UEFI Network Stack |

### 4.4.10 USB Configuration

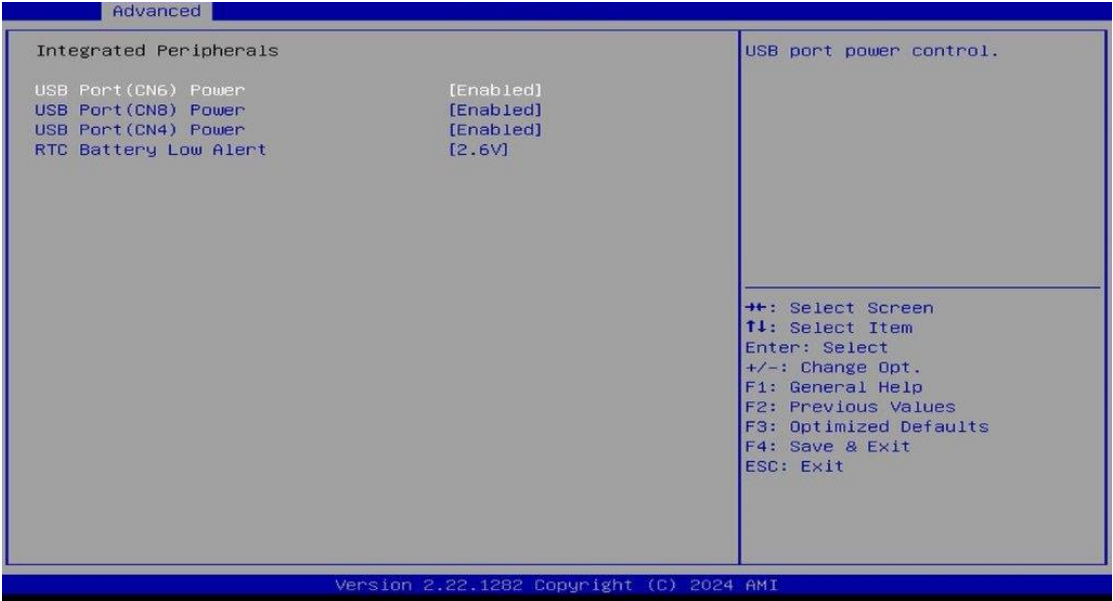

### 4.4.11 NVME Configuration



## 4.5 Chipset Settings



| BIOS Setting                    | Description                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------|
| System Agent (SA) Configuration | System Agent (SA) parameters                                                                                |
| PCH-IO Configuration            | PCH parameters                                                                                              |
| VT-d                            | Enables / Disables VT-d capability.                                                                         |
| USB Port Disable Override       | Selectively enable/disable the corresponding USB port from reporting a device connection to the controller. |

### 4.5.1 System Agent Configuration




### 4.5.2 PCH-IO Configuration


| BIOS Setting                 | Description                                                                            |
|------------------------------|----------------------------------------------------------------------------------------|
| SATA and RST Configuration   | SATA device options settings                                                           |
| USB Configuration            | USB configuration settings                                                             |
| Power-on after Power failure | Specify what state to go to when power is re-applied after a power failure (G3 state). |




## 4.6 Security Settings

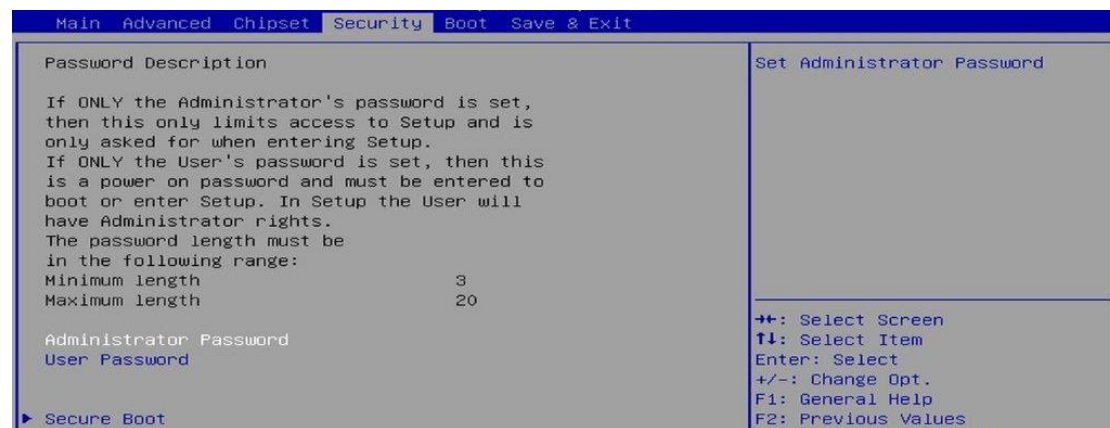

| BIOS Setting           | Description                     |
|------------------------|---------------------------------|
| Administrator Password | Sets an administrator password. |
| User Password          | Sets a user password.           |
| Secure Boot            | Secure Boot configuration       |

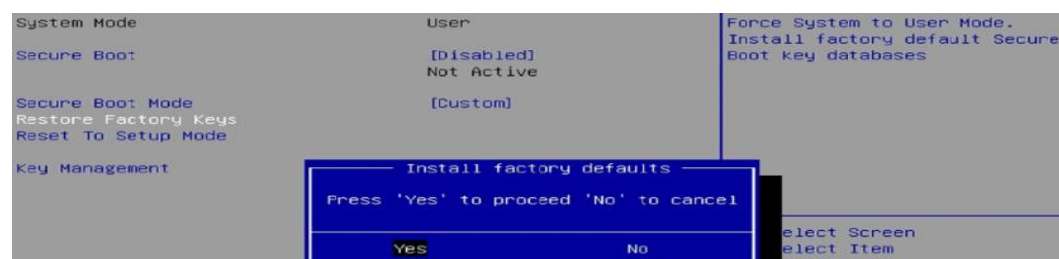

4.7 Boot Settings

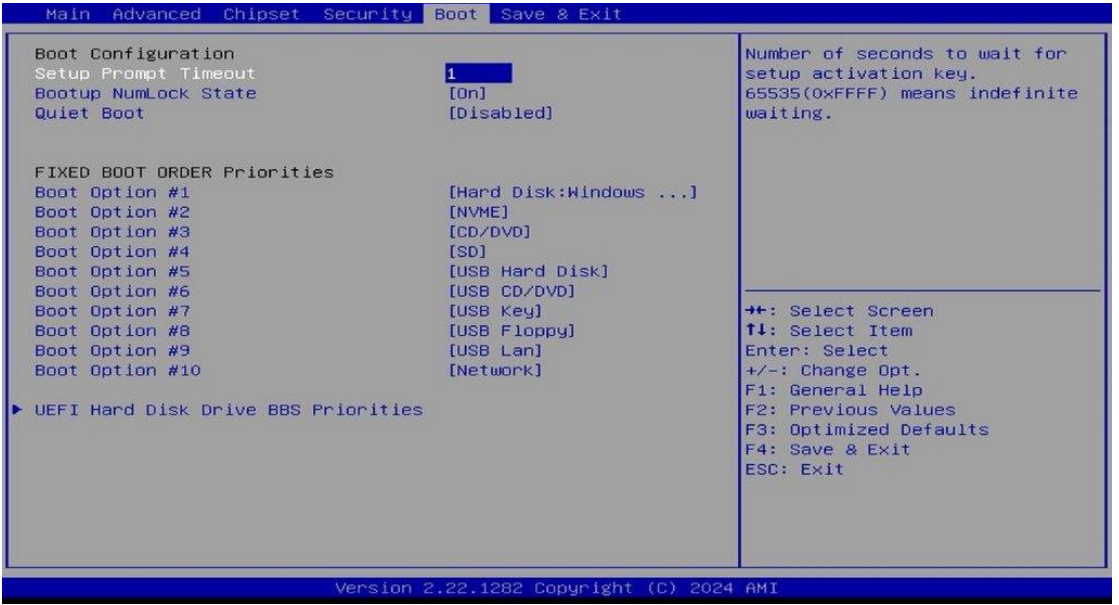

| BIOS Setting                        | Description                                                                                  |
|-------------------------------------|----------------------------------------------------------------------------------------------|
| Setup Prompt Timeout                | Number of seconds to wait for setup activation key. 65535 (0xFFFF) means indefinite waiting. |
| Bootup NumLock State                | Selects the keyboard NumLock state.                                                          |
| Quiet Boot                          | Enables / Disables Quiet Boot option.                                                        |
| Fixed Boot Order Priorities         | Sets the system boot order.                                                                  |
| UEFI Hard Disk Drive BBS Priorities | Specifies the Boot Device Priority sequence from available Uefl Hark Disk Drives.            |

## 4.8 Save & Exit Settings



| BIOS Setting              | Description                                                 |
|---------------------------|-------------------------------------------------------------|
| Save Changes and Exit     | Exits system setup after saving the changes.                |
| Discard Changes and Exit  | Exits system setup without saving any changes.              |
| Save Changes and Reset    | Resets the system after saving the changes.                 |
| Discard Changes and Reset | Resets system setup without saving any changes.             |
| Save Changes              | Saves changes done so far to any of the setup options.      |
| Discard Changes           | Discards changes done so far to any of the setup options.   |
| Restore Defaults          | Restores / Loads defaults values for all the setup options. |
| Save as User Defaults     | Saves the changes done so far as user defaults.             |
| Restore User Defaults     | Restores the user defaults to all the setup options.        |

# Appendix

This section provides the mapping addresses of peripheral devices and the sample code of watchdog timer configuration.

- I/O Port Address Map
- Interrupt Request Lines (IRQ)
- Watchdog Timer Configuration

## A. I/O Port Address Map

Each peripheral device in the system is assigned a set of I/O port addresses which also becomes the identity of the device. The following table lists the I/O port addresses used.

| Address               | Device Description                |
|-----------------------|-----------------------------------|
| 0x00000A00-0x00000A0F | Motherboard resources             |
| 0x00000A10-0x00000A1F | Motherboard resources             |
| 0x00000A20-0x00000A2F | Motherboard resources             |
| 0x0000002E-0x0000002F | Motherboard resources             |
| 0x0000004E-0x0000004F | Motherboard resources             |
| 0x00000061-0x00000061 | Motherboard resources             |
| 0x00000063-0x00000063 | Motherboard resources             |
| 0x00000065-0x00000065 | Motherboard resources             |
| 0x00000067-0x00000067 | Motherboard resources             |
| 0x00000070-0x00000070 | Motherboard resources             |
| 0x00000080-0x00000080 | Motherboard resources             |
| 0x00000092-0x00000092 | Motherboard resources             |
| 0x000000B2-0x000000B3 | Motherboard resources             |
| 0x00000680-0x0000069F | Motherboard resources             |
| 0x0000164E-0x0000164F | Motherboard resources             |
| 0x0000EFA0-0x0000EFBF | Intel(R) SMBus - 06A3             |
| 0x000003F8-0x000003FF | Communications Port (COM1)        |
| 0x000002F8-0x000002FF | Communications Port (COM2)        |
| 0x000003E8-0x000003EF | Communications Port (COM3)        |
| 0x000002E8-0x000002EF | Communications Port (COM4)        |
| 0x00000020-0x00000021 | Programmable interrupt controller |
| 0x00000024-0x00000025 | Programmable interrupt controller |
| 0x00000028-0x00000029 | Programmable interrupt controller |
| 0x0000002C-0x0000002D | Programmable interrupt controller |
| 0x00000030-0x00000031 | Programmable interrupt controller |

| Address               | Device Description                |
|-----------------------|-----------------------------------|
| 0x00000034-0x00000035 | Programmable interrupt controller |
| 0x00000038-0x00000039 | Programmable interrupt controller |
| 0x0000003C-0x0000003D | Programmable interrupt controller |
| 0x000000A0-0x000000A1 | Programmable interrupt controller |
| 0x000000A4-0x000000A5 | Programmable interrupt controller |
| 0x000000A8-0x000000A9 | Programmable interrupt controller |
| 0x000000AC-0x000000AD | Programmable interrupt controller |
| 0x000000B0-0x000000B1 | Programmable interrupt controller |
| 0x000000B4-0x000000B5 | Programmable interrupt controller |
| 0x000000B8-0x000000B9 | Programmable interrupt controller |
| 0x000000BC-0x000000BD | Programmable interrupt controller |
| 0x000004D0-0x000004D1 | Programmable interrupt controller |
| 0x00001800-0x000018FE | Motherboard resources             |
| 0x000000F0-0x000000F0 | Numeric data processor            |
| 0x00000000-0x00000CF7 | PCI Express Root Complex          |
| 0x00000D00-0x0000FFFF | PCI Express Root Complex          |
| 0x00000040-0x00000043 | System timer                      |
| 0x00000050-0x00000053 | System timer                      |
| 0x00001854-0x00001857 | Motherboard resources             |
| 0x00002000-0x000020FE | Motherboard resources             |
| 0x00003000-0x0000303F | Intel(R) UHD Graphics 630         |
| 0x00003090-0x00003097 | Standard SATA AHCI Controller     |
| 0x00003080-0x00003083 | Standard SATA AHCI Controller     |
| 0x00003060-0x0000307F | Standard SATA AHCI Controller     |

## B. Interrupt Request Lines (IRQ)

Peripheral devices use interrupt request lines to notify CPU for the service required. The following table shows the IRQ used by the devices on board.

| Level             | Function                                                       |
|-------------------|----------------------------------------------------------------|
| IRQ 4294967294    | Intel(R) PCI Express Root Port #12 - 06B3                      |
| IRQ 16            | High Definition Audio Controller                               |
| IRQ 4             | Communications Port (COM1)                                     |
| IRQ 3             | Communications Port (COM2)                                     |
| IRQ 7             | Communications Port (COM3)                                     |
| IRQ 6             | Communications Port (COM4)                                     |
| IRQ 13            | Numeric data processor                                         |
| IRQ 55~IRQ 204    | Microsoft ACPI-Compliant System                                |
| IRQ 256 ~ IRQ 511 | Microsoft ACPI-Compliant System                                |
| IRQ 4294967293    | Intel(R) PCI Express Root Port #11 - 06B2                      |
| IRQ 4294967289    | Intel(R) USB 3.1 eXtensible Host Controller - 1.10 (Microsoft) |
| IRQ 0             | System timer                                                   |
| IRQ 45            | Trusted Platform Module 2.0                                    |
| IRQ 4294967290    | Intel(R) UHD Graphics 630                                      |
| IRQ 4294967292    | Intel(R) PCIe Controller (x16) - 1901                          |
| IRQ 14            | Intel(R) Serial IO GPIO Host Controller - INT3450              |
| IRQ 4294967291    | Standard SATA AHCI Controller                                  |
| IRQ 4294967279~83 | Intel(R) Ethernet Controller (3) I225-V                        |
| IRQ 4294967284~88 | Intel(R) Ethernet Controller (3) I225-V #2                     |
| IRQ 4294967278    | Intel(R) Management Engine Interface                           |
| IRQ 4294967294    | Intel(R) PCI Express Root Port #12 - 06B3                      |

## C. Watchdog Timer Configuration

The Watchdog Timer (WDT) is used to generate a variety of output signals after a user programmable count. The WDT is suitable for the use in the prevention of system lock-up, such as when software becomes trapped in a deadlock. Under these sorts of circumstances, the timer will count to zero and the selected outputs will be driven.

Under normal circumstance, you will need to restart the WDT at regular intervals before the timer counts to zero.

### Sample Code

```
//-----
//
// THIS CODE AND INFORMATION IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY
// KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE
// IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR
// PURPOSE.
//
//-----
#include <dos.h>
#include <conio.h>
#include <stdio.h>
#include <stdlib.h>
#include "F81964.H"
//-----
int main (int argc, char *argv[]);
void EnableWDT(int);
void DisableWDT(void);
//-----
int main (int argc, char *argv[])
{
    unsigned char bBuf;
    unsigned char bTime;
    char **endptr;

    char SIO;

    printf("Fintek 81964 watch dog program\n");
    SIO = Init_F81964();
    if (SIO == 0)
    {
        printf("Can not detect Fintek 81964, program abort.\n");
        return(1);
    }
    if (SIO == 0)

    if (argc != 2)
    {
```

```

        printf(" Parameter incorrect!!\n");
        return (1);
    }

    bTime = strtol (argv[1], endptr, 10);
    printf("System will reset after %d seconds\n", bTime);

    if (bTime)
    { EnableWDT(bTime); }
    else
    { DisableWDT();      }
    return 0;
}
//-----
void EnableWDT(int interval)
{
    unsigned char bBuf;

    bBuf = Get_F81964_Reg(0x2B);
    bBuf &= (~0x20);
    Set_F81964_Reg(0x2B,  bBuf);  //Enable WDTO

    Set_F81964_LD(0x07);          //switch to logic device 7
    Set_F81964_Reg(0x30,  0x01);  //enable timer

    bBuf = Get_F81964_Reg(0xF5);
    bBuf &= (~0x0F);
    bBuf |= 0x52;
    Set_F81964_Reg(0xF5,  bBuf);  //count mode is second

    Set_F81964_Reg(0xF6,  interval); //set timer

    bBuf = Get_F81964_Reg(0xFA);
    bBuf |= 0x01;
    Set_F81964_Reg(0xFA,  bBuf);  //enable WDTO output

    bBuf = Get_F81964_Reg(0xF5);
    bBuf |= 0x20;
    Set_F81964_Reg(0xF5,  bBuf);  //start counting
}
//-----
void DisableWDT(void)
{
    unsigned char bBuf;

    Set_F81964_LD(0x07);          //switch to logic device 7

    bBuf = Get_F81964_Reg(0xFA);
    bBuf &= ~0x01;
    Set_F81964_Reg(0xFA,  bBuf);  //disable WDTO output
}

```

```

        bBuf = Get_F81964_Reg(0xF5);
        bBuf &= ~0x20;
        bBuf |= 0x40;
        Set_F81964_Reg(0xF5, bBuf); //disable WDT
    }
    //-----

    //-----
    //
    // THIS CODE AND INFORMATION IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY
    // KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE
    // IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR
    // PURPOSE.
    //
    //-----
    #include "F81964.H"
    #include <dos.h>
    //-----
    unsigned int F81964_BASE;
    void Unlock_F81964 (void);
    void Lock_F81964 (void);
    //-----
    unsigned int Init_F81964(void)
    {
        unsigned int result;
        unsigned char ucDid;

        F81964_BASE = 0x4E;
        result = F81964_BASE;

        ucDid = Get_F81964_Reg(0x20);
        if (ucDid == 0x07) //Fintek 81964
        { goto Init_Finish; }

        F81964_BASE = 0x2E;
        result = F81964_BASE;

        ucDid = Get_F81964_Reg(0x20);
        if (ucDid == 0x07) //Fintek 81964
        { goto Init_Finish; }

        F81964_BASE = 0x00;
        result = F81964_BASE;

    Init_Finish:
        return (result);
    }

```

```

//-----
void Unlock_F81964 (void)
{
    outportb(F81964_INDEX_PORT, F81964_UNLOCK);
    outportb(F81964_INDEX_PORT, F81964_UNLOCK);
}
//-----
void Lock_F81964 (void)
{
    outportb(F81964_INDEX_PORT, F81964_LOCK);
}
//-----
void Set_F81964_LD( unsigned char LD)
{
    Unlock_F81964();
    outportb(F81964_INDEX_PORT, F81964_REG_LD);
    outportb(F81964_DATA_PORT, LD);
    Lock_F81964();
}
//-----
void Set_F81964_Reg( unsigned char REG, unsigned char DATA)
{
    Unlock_F81964();
    outportb(F81964_INDEX_PORT, REG);
    outportb(F81964_DATA_PORT, DATA);
    Lock_F81964();
}
//-----
unsigned char Get_F81964_Reg(unsigned char REG)
{
    unsigned char Result;
    Unlock_F81964();
    outportb(F81964_INDEX_PORT, REG);
    Result = inportb(F81964_DATA_PORT);
    Lock_F81964();
    return Result;
}
//-----

```

```

//-----
//
// THIS CODE AND INFORMATION IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY
// KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE
// IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR
// PURPOSE.
//
//-----
#ifndef F81964_H
#define F81964_H 1
//-----
#define F81964_INDEX_PORT (F81964_BASE)
#define F81964_DATA_PORT (F81964_BASE+1)
//-----
#define F81964_REG_LD 0x07
//-----
#define F81964_UNLOCK 0x87
#define F81964_LOCK 0xAA
//-----
unsigned int Init_F81964(void);
void Set_F81964_LD( unsigned char);
void Set_F81964_Reg( unsigned char,
unsigned char); unsigned char
Get_F81964_Reg( unsigned char);
//-----
#endif // F81964_H

```