


# Mi1061

## Intel® 14<sup>th</sup> Gen Core™ i3/i5/i7/i9 Mini-iTx, with H610 Chipset



- Support Intel® 14/13/12<sup>th</sup> Gen. Core™ i3/i5/i7/i9 CPU
- Chipsets base Intel® H610 for 12~14<sup>th</sup> Gen.
- 2x Gigabits Ethernet Lan
- 12x USBs (4 x 3.2, 8 x 2.0), 10x Serials/COMs
- 1x Full size PCIe x16, 2x M.2 (M2280, E2230)
- 1x HDMI, 1x VGA, 1xPS2, AudioAC<sup>97</sup>

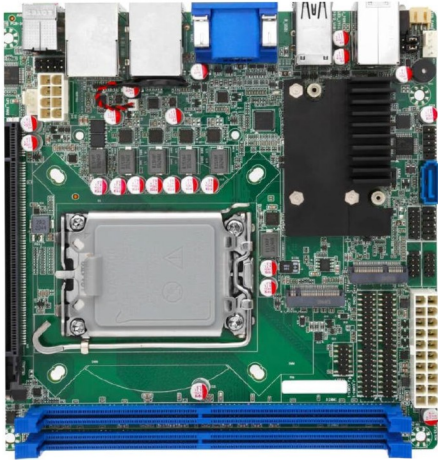

SPECIFICATIONS	
CPU	Support Intel® 12/13/14th Gen Core™ i3/i5/i7/i9, Pentium®, Celeron® CPU
Chipset	Intel® H610 Chipset, TDP 6W
Memory	DDR4-3200, 2*U-DIMM, up to 64GB
Storage	1x SATA 3.0
	1x M.2 (Key-M, 2280, PCIe x4 / SATA, SSD)
Expansion	1x PCIe x16 Slot
	1x M.2 (Key-E, 2230, PCIe+USB 2.0, Wifi+BT)
BIOS	AMI UEFI BIOS
System	Windows 10/11, Linux
Communication I/O interface	
Network	2x Realtek® GbE Controller, RJ45
Serial	10x COM/RS232
USB	4x USB 3.2, 8x USB 2.0 (Total: 12)
Audio	Realtek® Audio HDA codec, with Line-out+MIC
GPIO	8x Programmable GPIO
Others	1x PS/2, 1x SPDIF
Display	Interface: 1x HDMI, 1x VGA
	Video Channels: Dual
Mechanical & Environment	
Dimension	Mini-ITX (170*170mm)
Power Input	ATX PSU
Temperature Operation	0°C~60°C, Storage: -20°C~75°C
Relative Humidity	5%~95%, non-condensing

